DRAW Set 20s-747-74 Decal Qantas 747-400ERs

"Civil Decals for the Civilized"

Qantas was a long time operator of the 747 and finally put the type to rest in 2020. The final six Qantas 747-400s were the specialized ER versions which enabled the Queen to serve some impressively long routes. Our decal depicts the five 747-400ERs in the final scheme prior to their retirement in 2020.




200 SCALE

COPYRIGHT © 2022 DRAWDecal.com





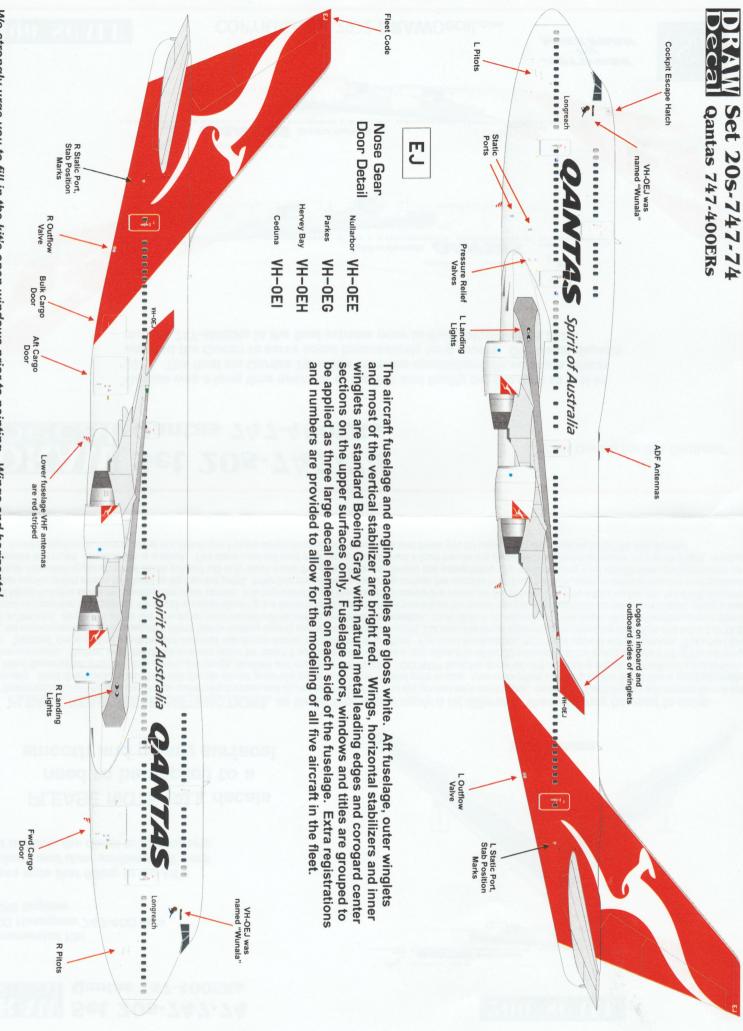

stabs have standard bare metal leading edges, always consult prototype photos. We strongly urge you to fill in the kit's open windows prior to painting. Wings and horizontal

DRAW Set 20s-747-74 Decal Qantas 747-400ERs

Recommended Kit: 1:200 Hasegawa 747-400 with GE CF6 Engines

Please note that filling in the kit's windows and door scribing will work best to allow the decal to fit properly.

PLEASE NOTE: ALL decals need to be applied to a smooth and glossy surface!



PLEASE READ THESE INSTRUCTIONS, as these decals may apply a bit differently than you may be used to using. **Next Generation** DIGITAL Silk decals are extremely durable and do not easily scratch, and are printed on a continuous, clear film. Each design will need to be cut out individually. **Next Generation** DIGITAL Silk decals do not generally need to be clear coated prior to use. Use care when applying as the decal film is **exceptionally** thin. **Next Generation** DIGITAL Silk decals are tough, durable and exceptionally **flexible**. **DO NOT** float the decal off of the backing paper, as it will curl up and likely become unusable. Rather, soak the decal in warm water for about 5 seconds then remove it and allow it to sit for 30 seconds before trying to slide it off of the backing paper. "Normal" decal setting solutions can be used with these decals but will have little effect. For most applications, NO decal solvent will be needed. If you feel the need, we recommend using Microscale's Micro Set (a wetting agent) and Micro Sol (a SOLvent), but note the decal solvents only effect the clear film and have **LITTLE** effect on the inks. Brush the Micro Set directly on your model before sliding the decal into position. Only slide a small portion of the decal off of the backing paper, place the decal into position then pull out the backing paper allowing the decal to land in place. After you adjust the decal into position and soak up the excess liquid, apply a thin coat of Micro Sol (the **solvent**) to soften the clear carrier. It is important to get the Micro Sol **under** the decal, as the solvent has little effect on the ink, but it will dissolve the clear carrier which allows the decal to dig into the paint. After this coat dries and you are certain the decal is in its final position, apply a second heavier coat of Micro Sol. Note repeated applications of decal solvent will only wash away the glue. After the decals are **completely** dry, clear coating your model after applying these (or any) decals is a must! I repeat this

