

Revell

KIT 5713


85571300200

B-58 HUSTLER

The Convair B-58 Hustler was one of the most unique aircraft in military service. Not only is it strikingly different in appearance, but it is the fastest bomber in the Strategic Air Command history. It set several international speed records, some still standing today. "Ginger" was one of the operational test vehicles, based at Edwards Airforce Base, CA.

On October 15, 1959, it became the first plane to sustain Mach 2 flight, flying between Seattle, Washington and Carswell AFB, in Texas, in 70 minutes, averaging nearly 1,320 mph. In October 1963, "Greased Lightning", flew from Tokyo to London in 8 hours, 35 minutes, averaging 938 mph. However, on the last leg, one of the afterburners failed, reducing its overall speed. It is one of the few surviving Hustlers, and is now on permanent display at the SAC museum in Ashland, Nebraska.

Your Revell model has a detailed cockpit showing unique pilot ejection pod, an optional standard fuel/weapons pod or extra capacity fuel/weapons pod and four nuclear bombs and authentic insignia decals.

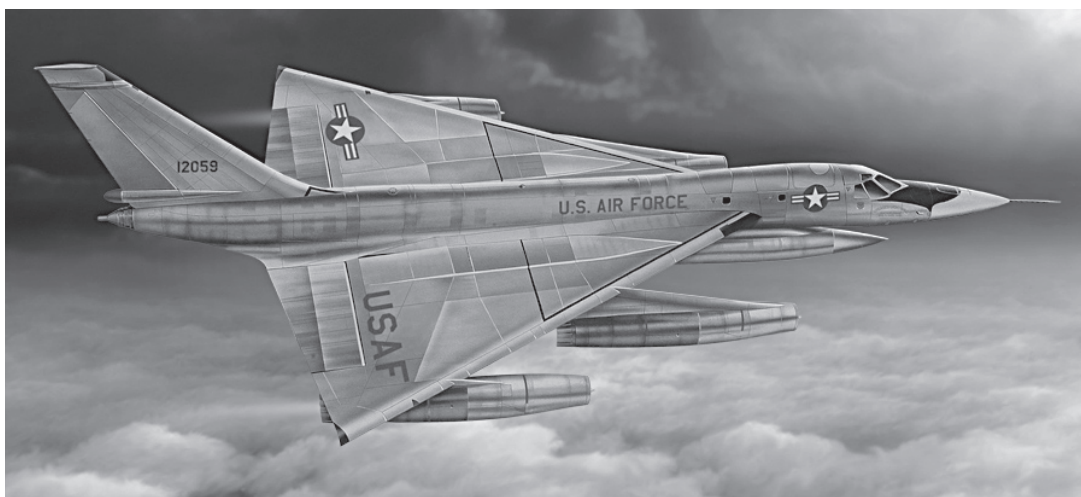

* REPEAT SEVERAL TIMES
* A REPETER PLUSIEURS FOIS



* REPEAT PROCEDURE
* RÉPÉTEZ LE PROCÉDÉ



* OPTIONAL PARTS
* PIÈCES EN OPTION



* DECAL
* DECAL COMMANIE



* ASSEMBLY CAUTION
* ATTENTION D'ASSEMBLÉE



* CEMENT TOGETHER
* A COLLER



* REMOVE AND THROW AWAY
* A RETIRER ET JETER



* DO NOT CEMENT
* NE PAS COLLER

READ THIS BEFORE YOU BEGIN

- * Study the assembly drawings.
- * Each plastic part is identified by a number.
- * In the assembly drawings, some parts will be marked by a star (★) to indicate chrome plated plastic.
- * For better paint and decal adhesion, wash the plastic parts in a mild detergent solution. Rinse and let air dry.
- * Check the fit of each piece before cementing in place.
- * Use only cement for polystyrene plastic.
- * Scrape plating and paint from areas to be cemented.
- * Allow paint to dry thoroughly before handling parts.
- * Any unused parts may be discarded.

DECAL APPLICATION INSTRUCTIONS

1. Cut desired decal from sheet.
2. Dip decal in water for a few seconds.
3. Place wet decal on paper towel.
4. Wait until decal is movable on paper backing.
5. Place decal in position on model, face up and slide backing away.
6. Press out air bubbles with a soft damp cloth.
7. Milkiness that may appear is for better decal adhesion and will dry clear. Wipe away any excess adhesive.
8. Do not touch decal until fully dry.
9. Allow the decals 48 hours to dry before applying clear coat.

NOTE: Decals are compatible with setting solutions or solvents.

LIRE CE QUI SUIT AVANT DE COMMENCER

- * Etudier les schémas de montage.
- * Chaque pièce en plastique est identifiée par un numéro.
- * Sur les schémas de montage, certaines pièces sont marquées d'une étoile (★) pour indiquer qu'elles sont en plastique chromé.
- * Pour une meilleure prise de la peinture et des autocollants, laver les pièces en plastique avec une solution détergente peu concentrée. Les rincer et les laisser sécher à l'air.
- * Vérifier que chaque pièce s'ajuste bien avant de la coller en place.
- * N'utiliser que de la colle pour polystyrène.
- * Gratter les parties à coller pour enlever le chrome et la peinture.
- * Laisser la peinture bien sécher avant de manipuler les pièces.
- * Toute pièce inutilisée peut être jetée.

DIRECTIVES D'APPLICATION DES AUTOCOLLANTS

1. Découper l'autocollant désiré de la feuille.
2. Tremper l'autocollant dans de l'eau pendant quelques secondes.
3. Placer l'autocollant mouillé sur une serviette en papier.
4. Attendez que l'autocollant puisse être déplacé sur son support en papier.
5. Mettre l'autocollant en position sur le modèle face sur le dessus et faire glisser le support pour l'enlever.
6. Appuyer avec un chiffon doux humide pour éliminer les bulles d'air.
7. La substance laiteuse qui peut apparaître est destinée à améliorer l'adhésion de l'autocollant et devient incolore au séchage. Essuyer pour enlever tout excédent d'adhésif.
8. Ne pas toucher l'autocollant tant qu'il n'est pas bien sec.
9. Laisser l'autocollant sécher pendant 48 heures avant d'appliquer une couche transparente.

REMARQUE: Les autocollants sont compatibles avec les solutions de fixation ou les solvants.

This paint guide is provided to complete this kit as shown on the box.

Ce guide de peintures est fourni pour reproduire le modèle réduit qui apparaît sur la boîte.

Gun Metal	Bronze
Flat Black	Noir mat
Semi Gloss White	Blanc satiné
Gloss Red	Rouge brillant
Steel	Acier
Gunmetal	Metallic
Dark Gull Gray	Gris cendré foncé
Light Gray	Gris clair
Aluminum	Aluminium
Gloss Green	Vert brillant

If you have any questions or comments, call our hotline at: **(800) 833-3570**
or, please write to:


Revell Inc Consumer Service Department, 1850 Howard Street Unit A, Elk Grove Village, Illinois 60007

Be sure to include the plan number (85571300200), part number, description, your return address and phone number.

Visit our website: www.revell.com


1

WINDOW ASSEMBLY


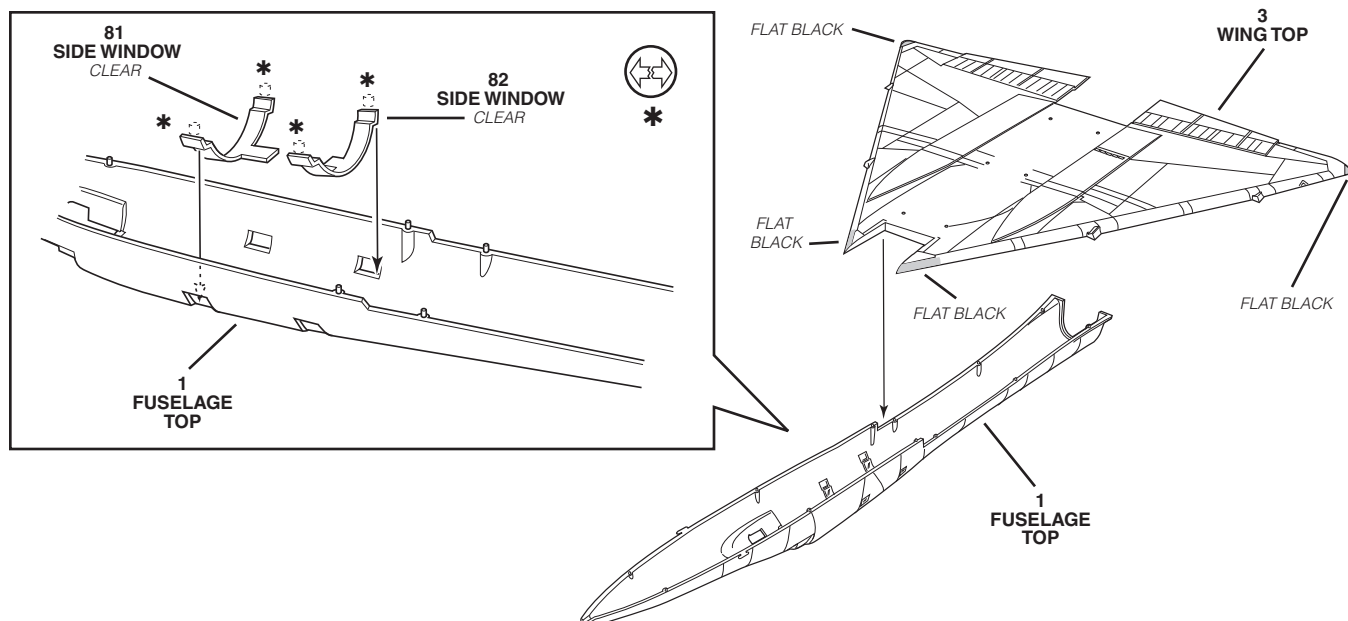


2

COCKPIT ASSEMBLY

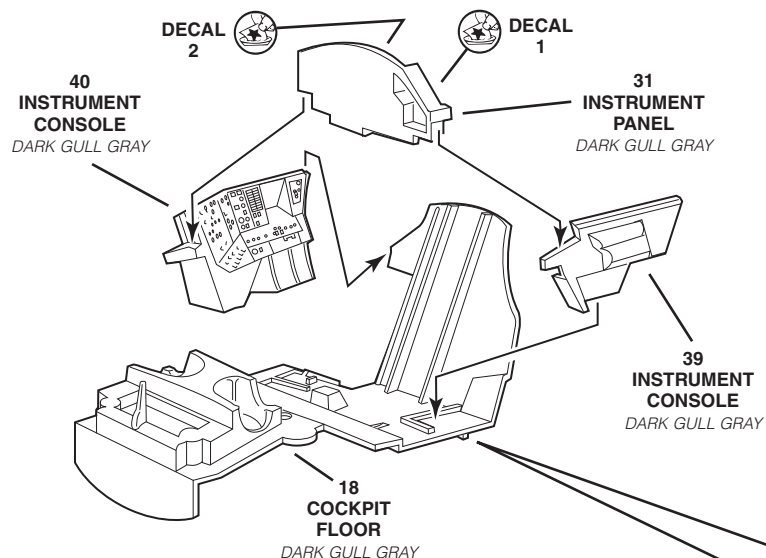


BLACK INSTRUMENTS SILVER DIALS

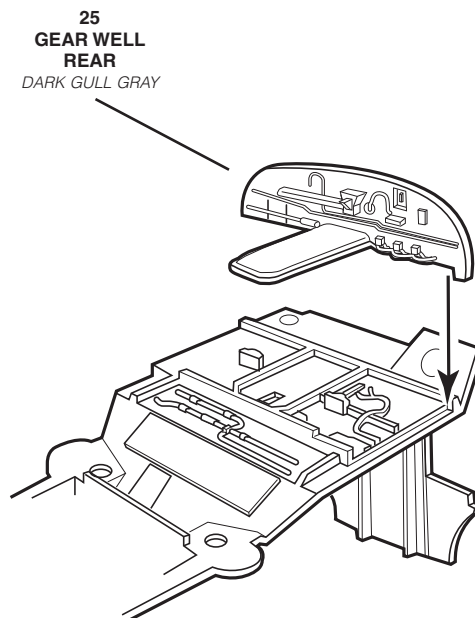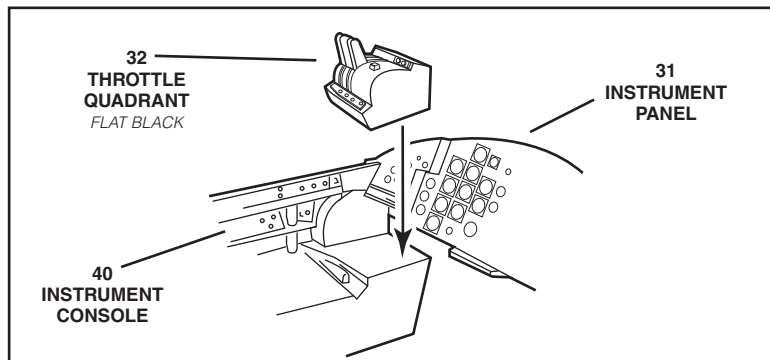


3

SEAT ASSEMBLY


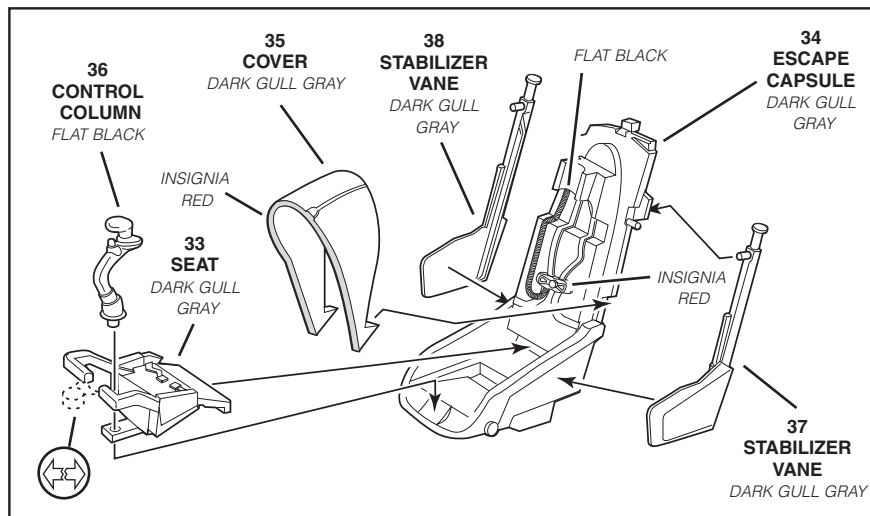


COMPLETED
COCKPIT

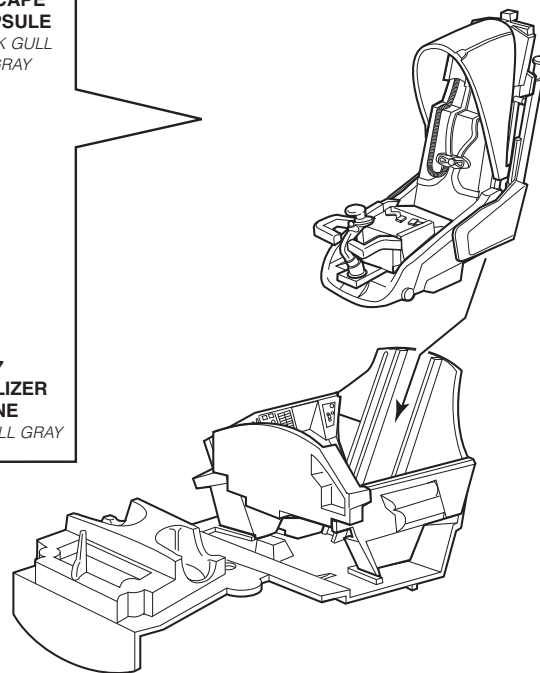

4

NOSE WHEEL ASSEMBLY

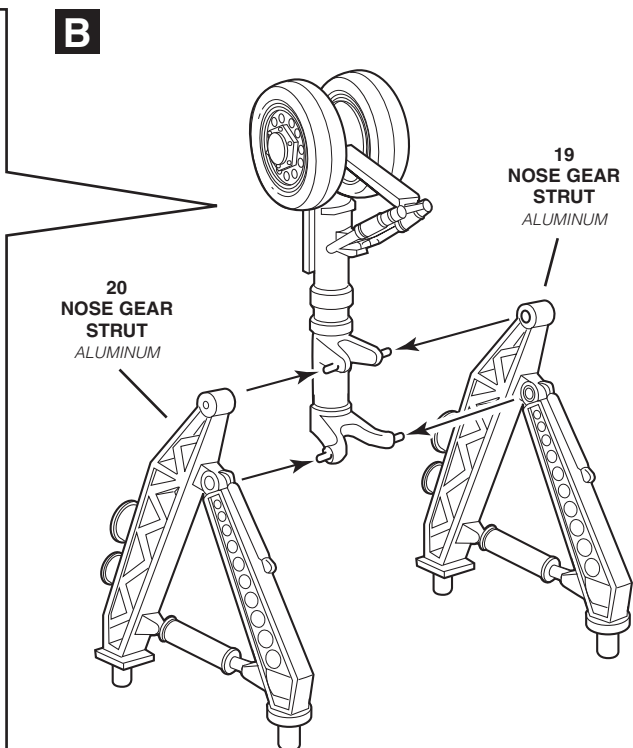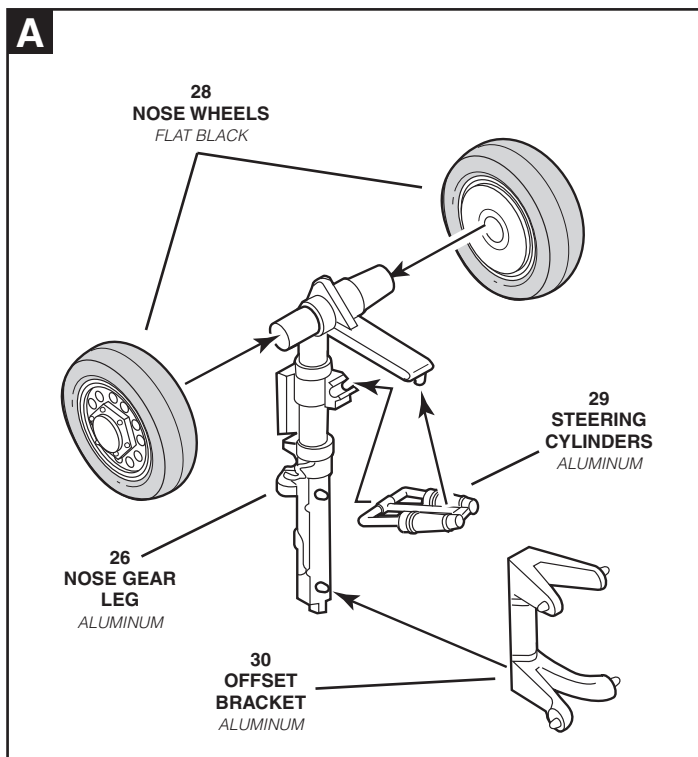


4

NOSE WHEEL ASSEMBLY CONTINUED


C

**NOSE WHEEL TO
UNDERSIDE OF
COCKPIT**

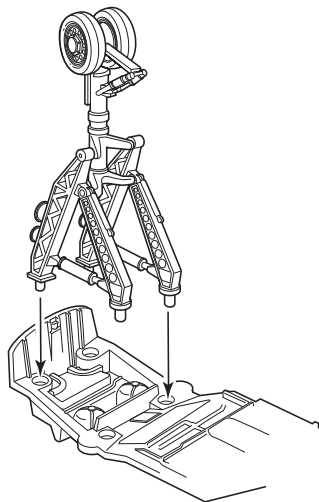

D


**COMPLETED
ASSEMBLY TO
FUSELAGE**

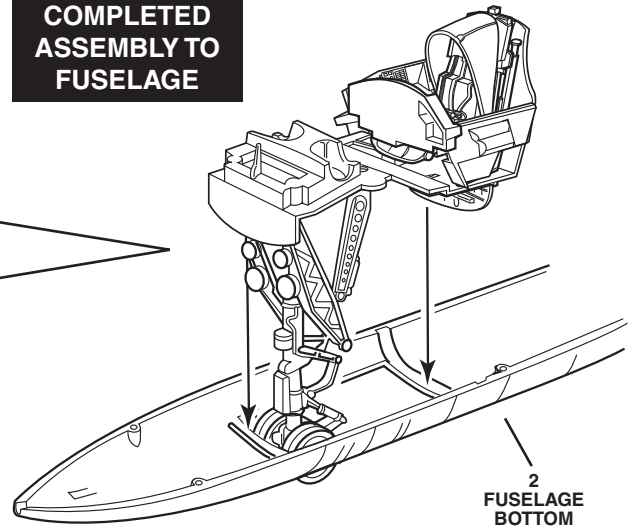

E

**21
DOOR LINK
ALUMINUM**


**22
DOOR LINK
ALUMINUM**

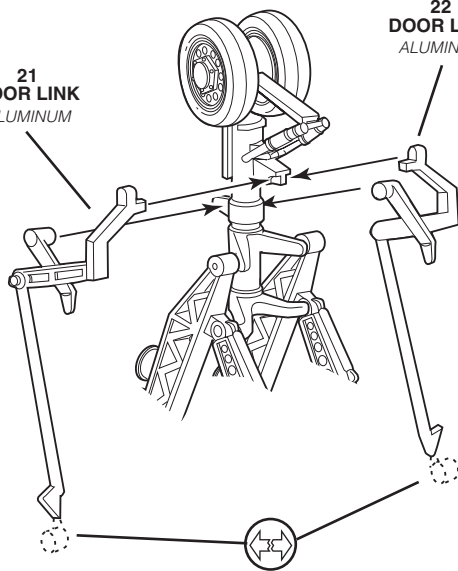

F


**23
NOSE GEAR
DOOR
DARK GULL GRAY
(INSIDE)**

**24
NOSE GEAR
DOOR
DARK GULL GRAY
(INSIDE)**

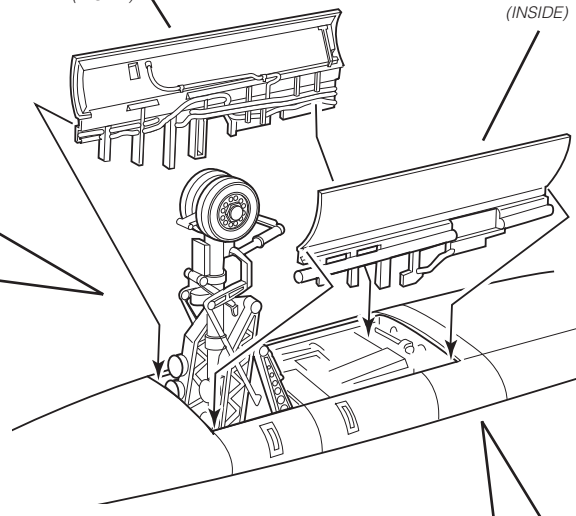

G


**7
PITOT MAST
FLAT BLACK**

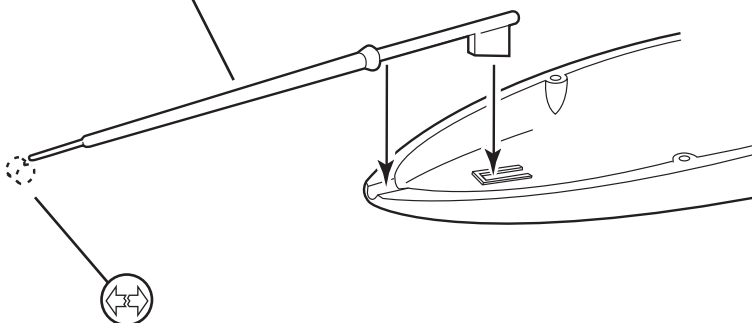

H

**27
DOOR DAMPER**

**FLAT
BLACK**

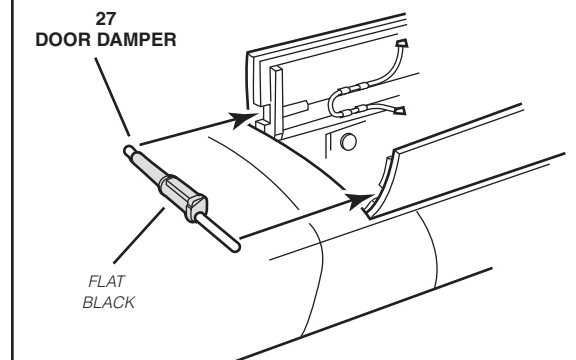

5

MAIN GEAR WELL / WHEEL ASSEMBLY

A

(2X)

43
MAIN GEAR
LEG
ALUMINUM

51
GEAR WELL
FRONT
DARK GULL GRAY

50
ACCUMULATOR
ALUMINUM

53
GEAR WELL
ROOF
DARK GULL GRAY

B

(*) (2X)

45
RETRACTION
STRUT
ALUMINUM

45
RETRACTION
STRUT
ALUMINUM

49
LOCK
STRUT
ALUMINUM






49
LOCK STRUT
ALUMINUM

C

4
WING BOTTOM

5

MAIN GEAR WELL / WHEEL CONTINUED

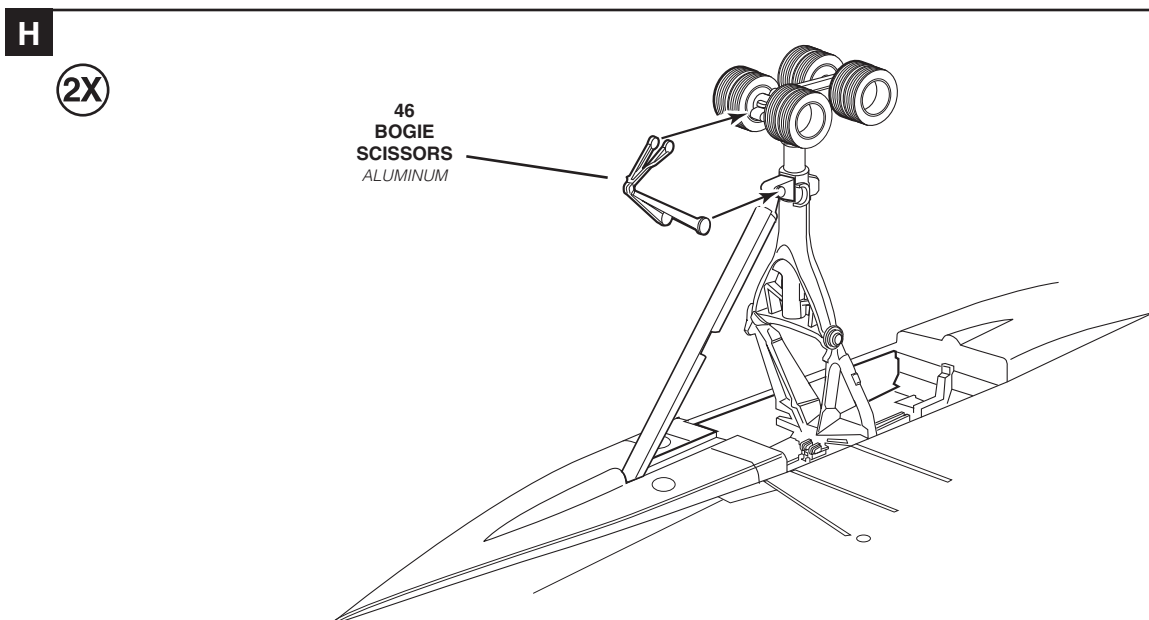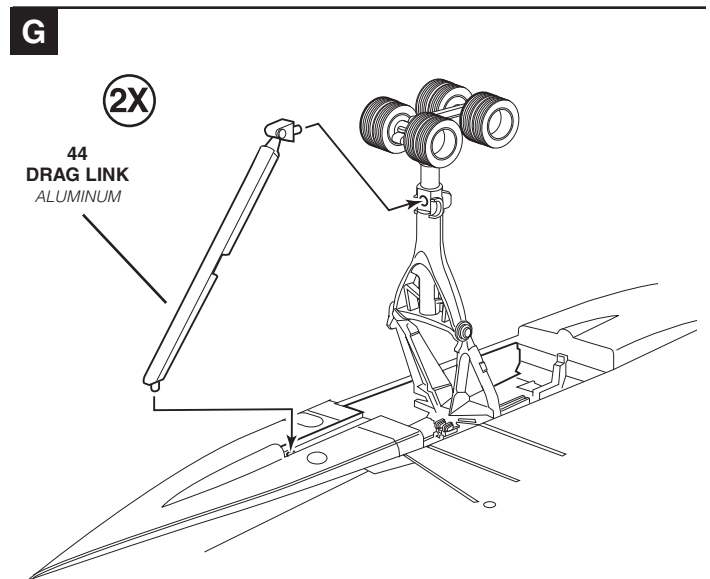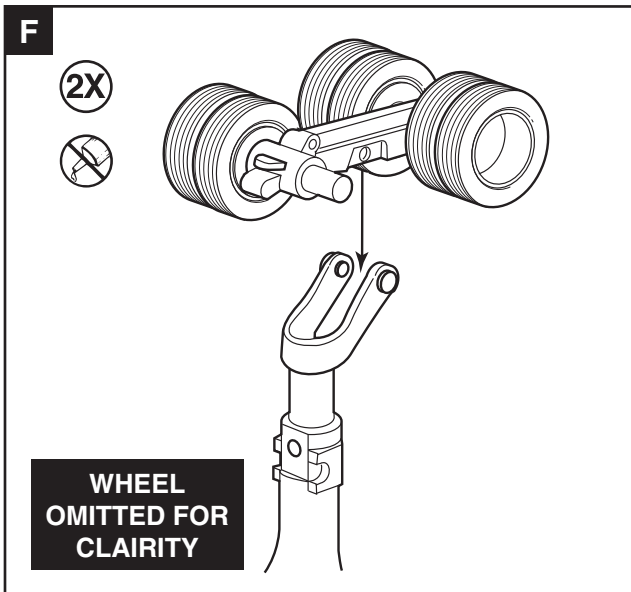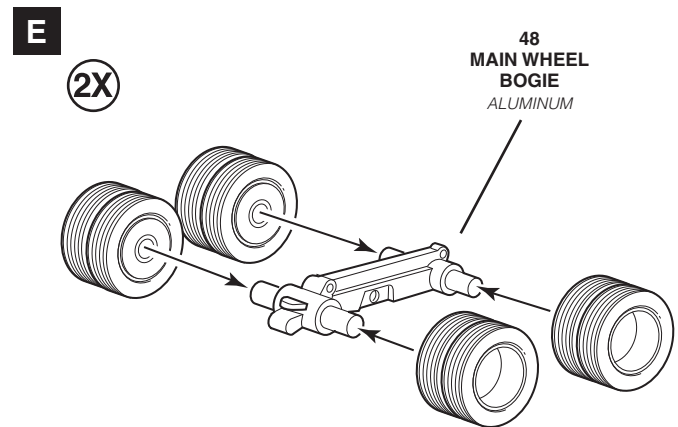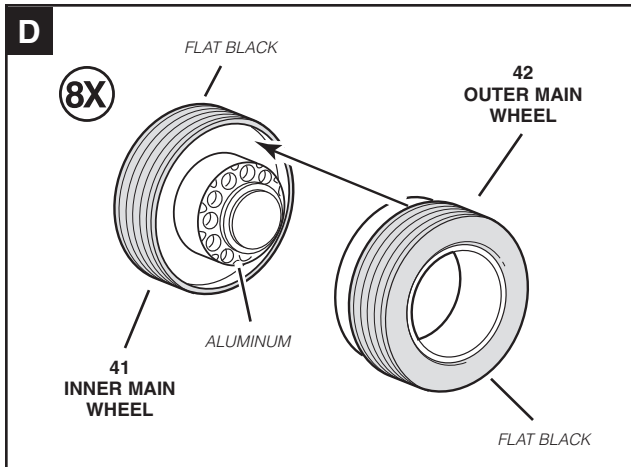


5

MAIN GEAR WELL / WHEEL CONTINUED

1


2X

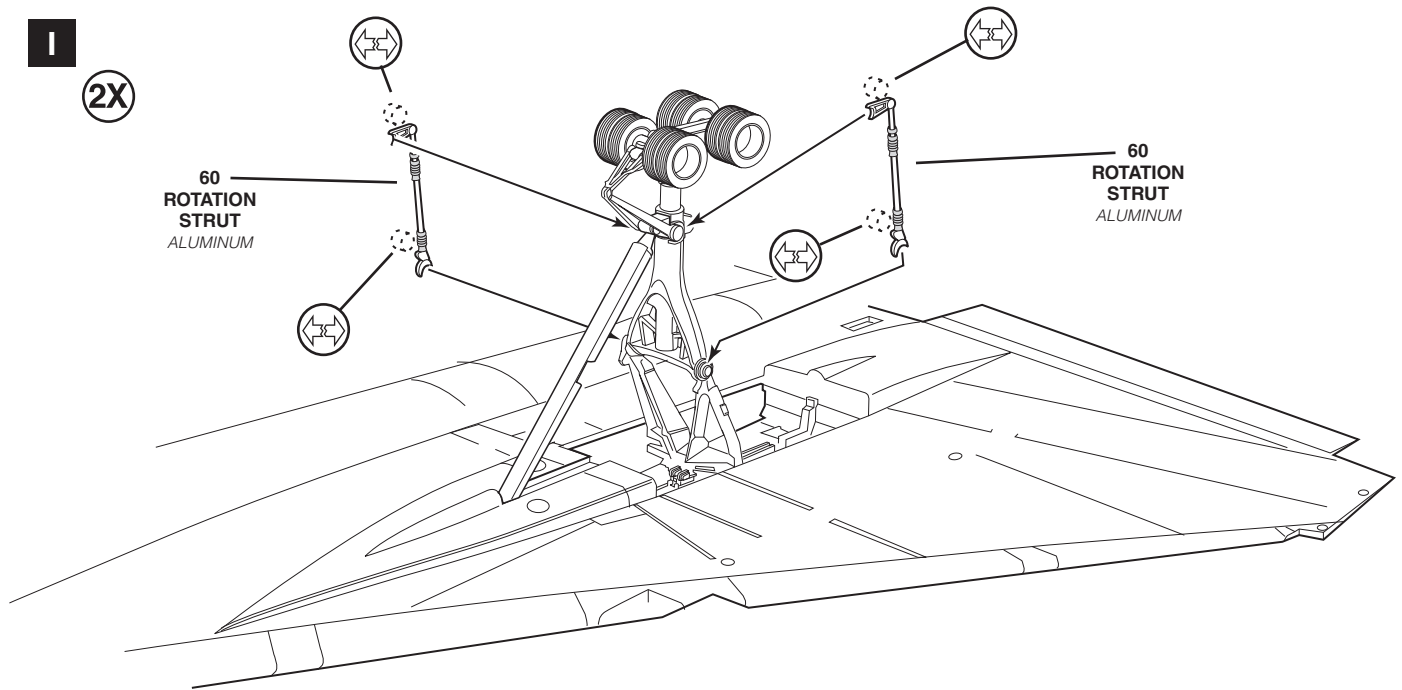

6

MAIN GEAR DOOR ASSEMBLY


2X

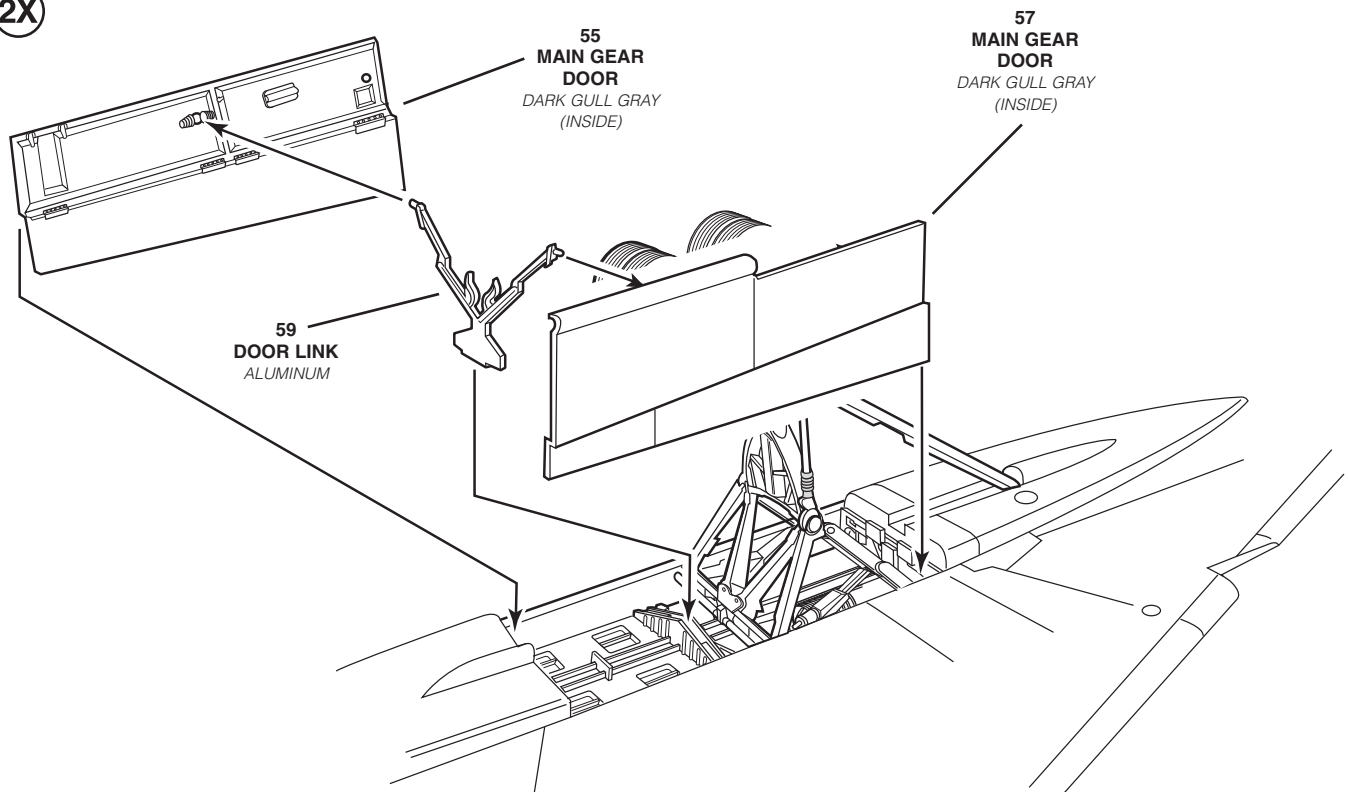

6


MAIN GEAR DOOR CONTINUED

2X

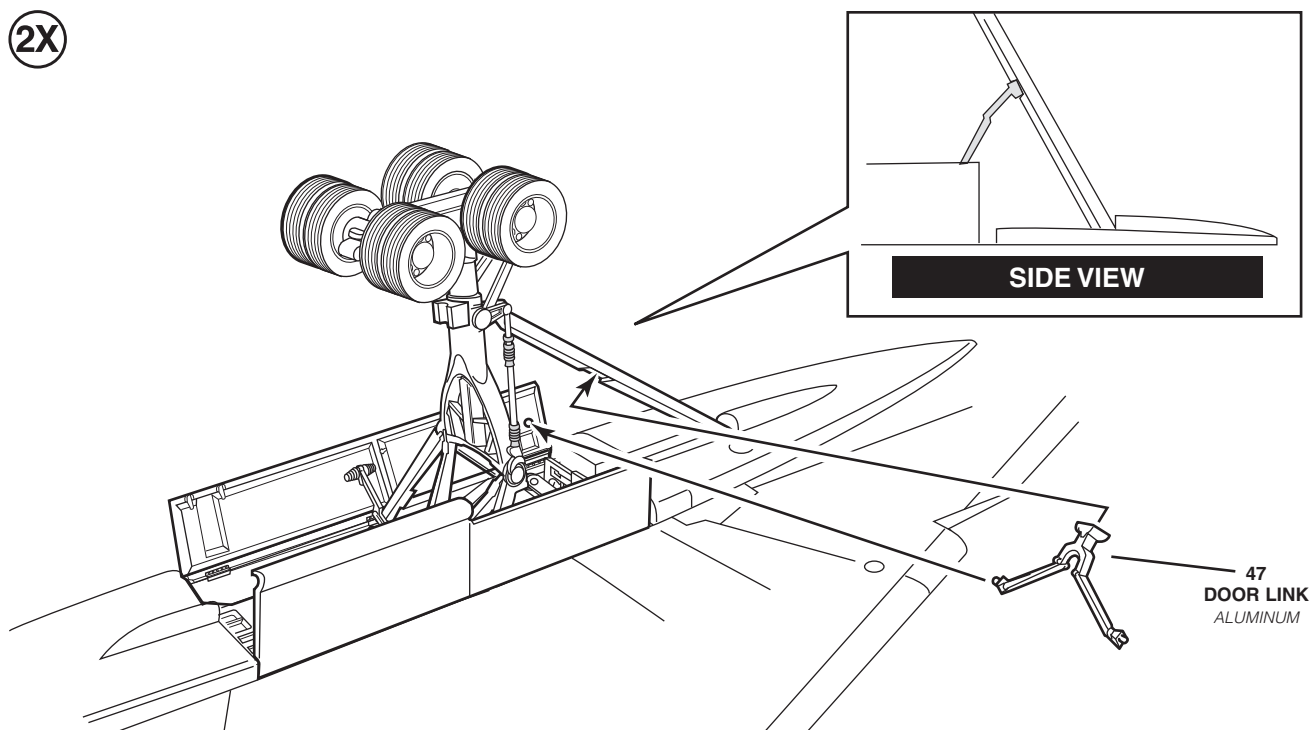


7

FUSELAGE / WING ASSEMBLY

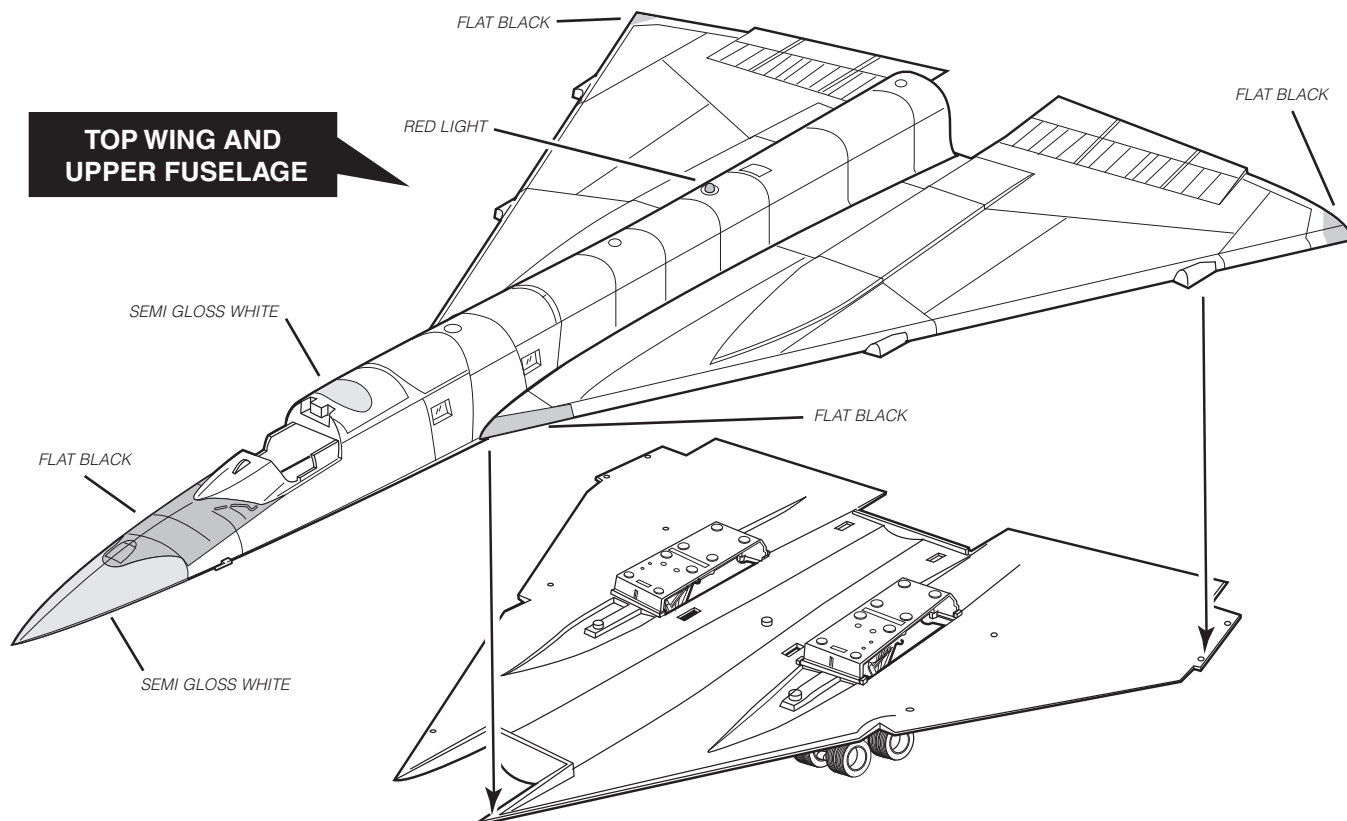

8

FUSELAGE ASSEMBLY

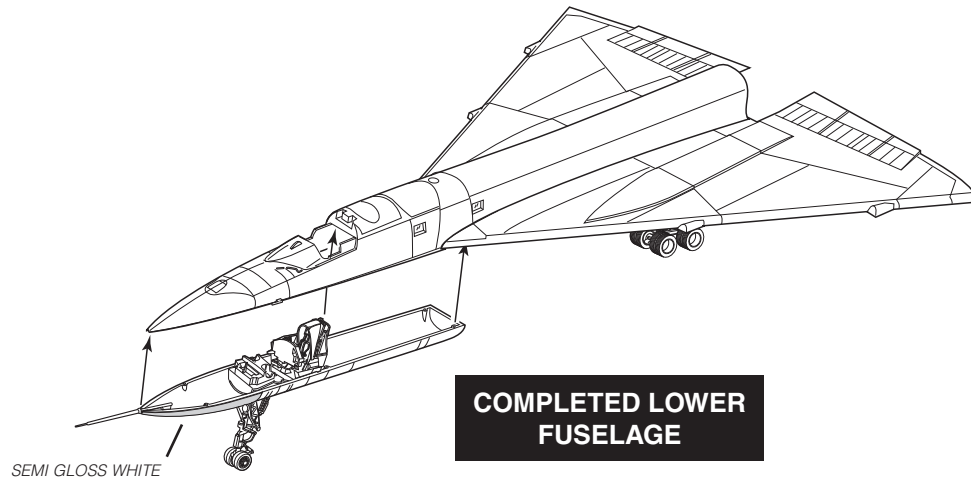

9

ENGINE POD ASSEMBLY

INNER PODS

(2X)

72
ENGINE POD
HALF



DECAL
29

13
INTAKE CONE
ALUMINUM

71
ENGINE POD
HALF


REPEAT FOR OTHER SIDE USING PARTS
69, 70

(2X)

14
EXHAUST
NOZZLE
ALUMINUM

15
FLAME HOLDER
GUNMETAL

(2X)

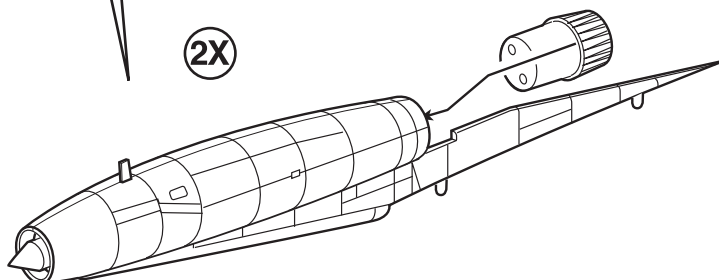

OUTER PODS

(2X)

12
ENGINE POD
HALF



DECAL
29

13
INTAKE CONE
ALUMINUM

11
ENGINE POD
HALF


REPEAT FOR OTHER SIDE USING PARTS
10, 9

(2X)

14
EXHAUST
NOZZLE
ALUMINUM

15
FLAME HOLDER
GUNMETAL


(2X)

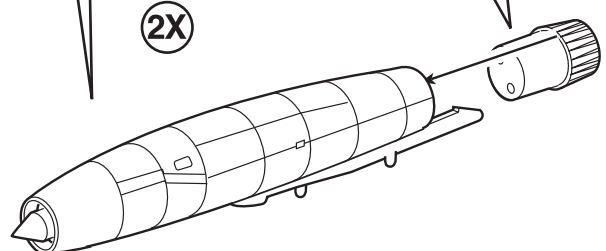


9

PODS TO WING ASSEMBLY CONTINUED

RIGHT

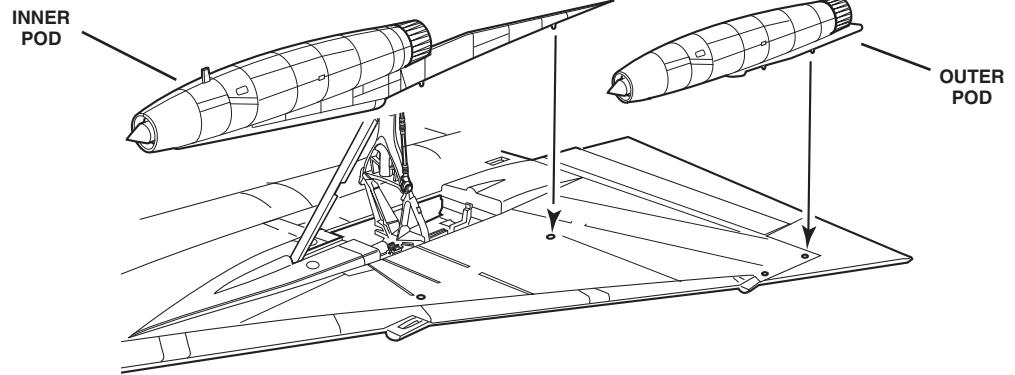

LEFT

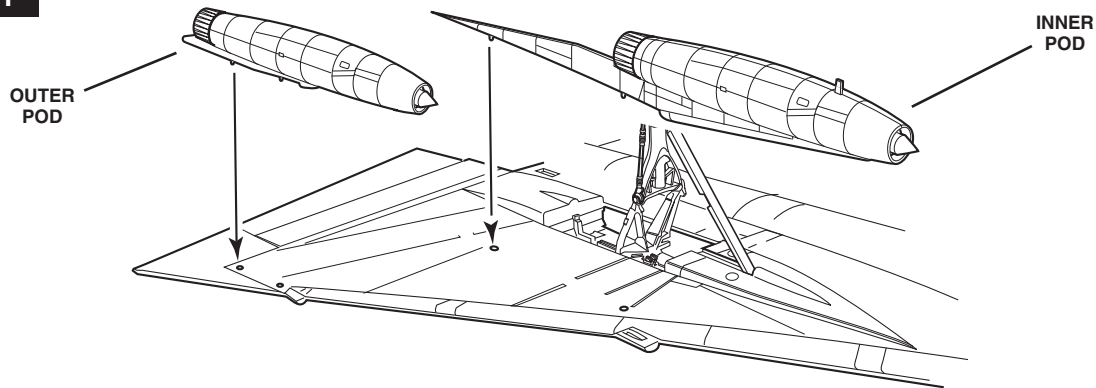


10

BOMB / RACK ASSEMBLY

(2X)


77 BOMB HALF ALUMINUM

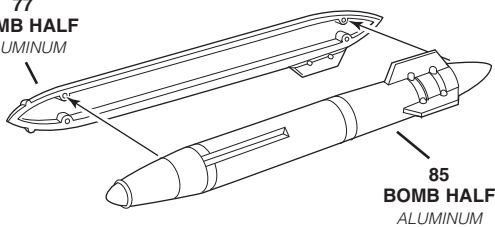

85 BOMB HALF ALUMINUM


(2X)

75 BOMB HALF ALUMINUM

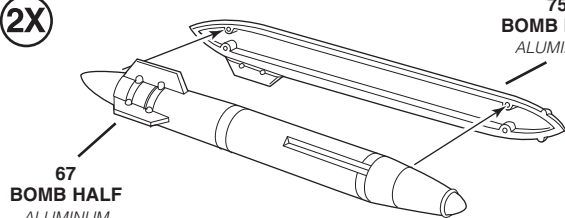

67 BOMB HALF ALUMINUM


(2X)

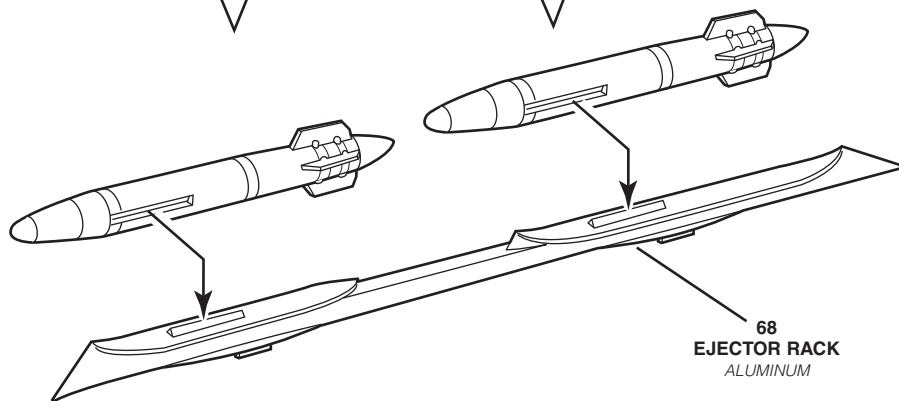

68 EJECTOR RACK ALUMINUM


10




BOMB RACK TO FUSELAGE ASSEMBLY




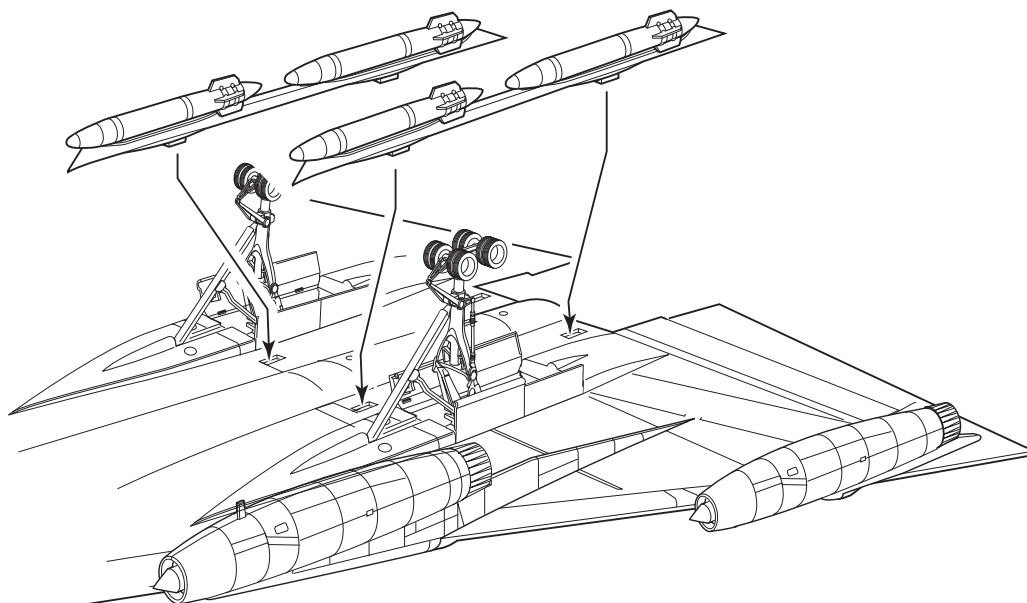


11


TAIL ASSEMBLY

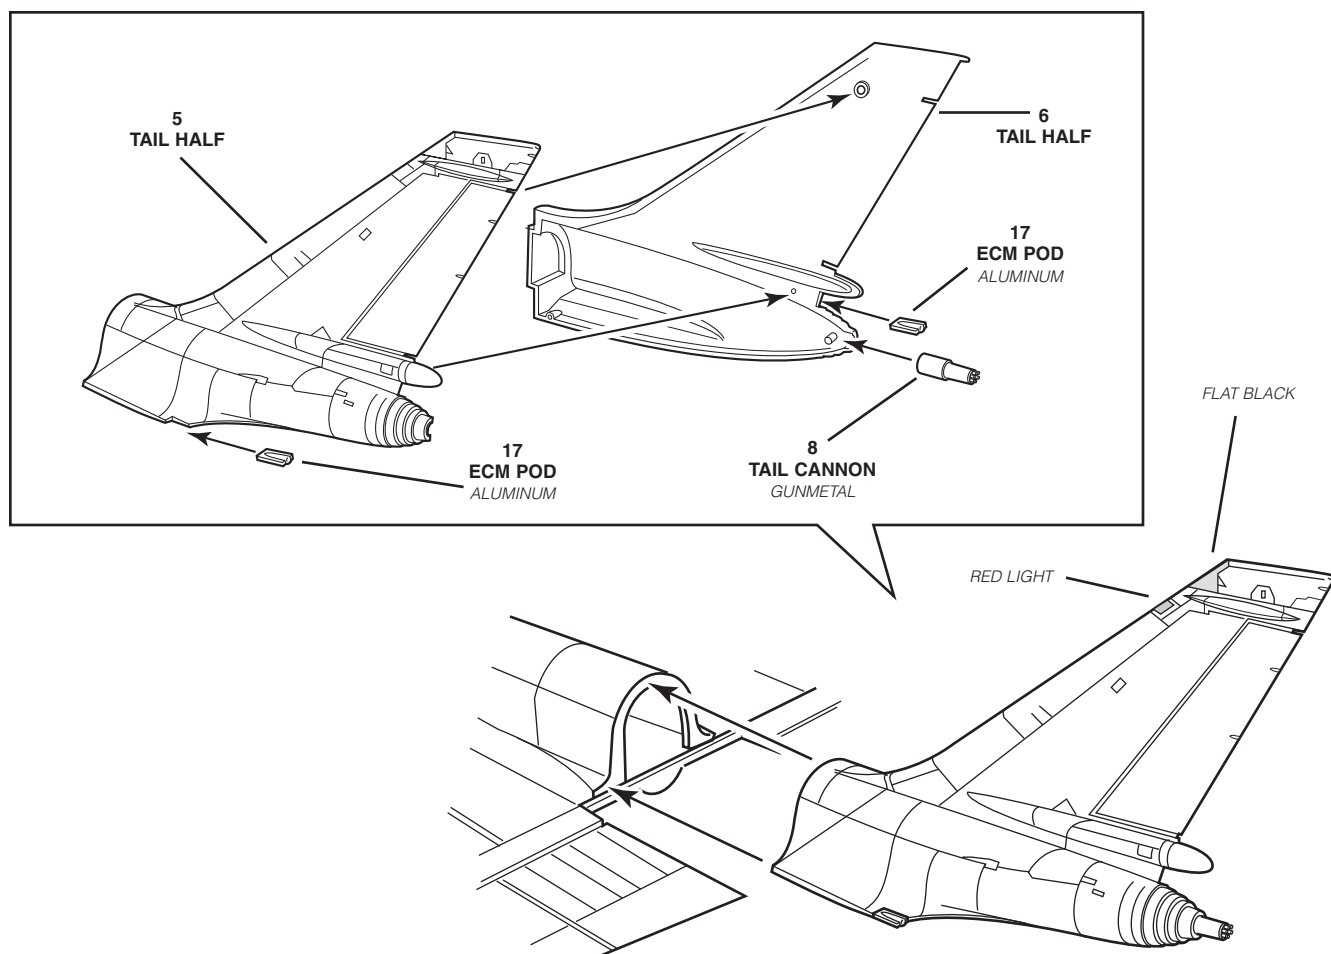

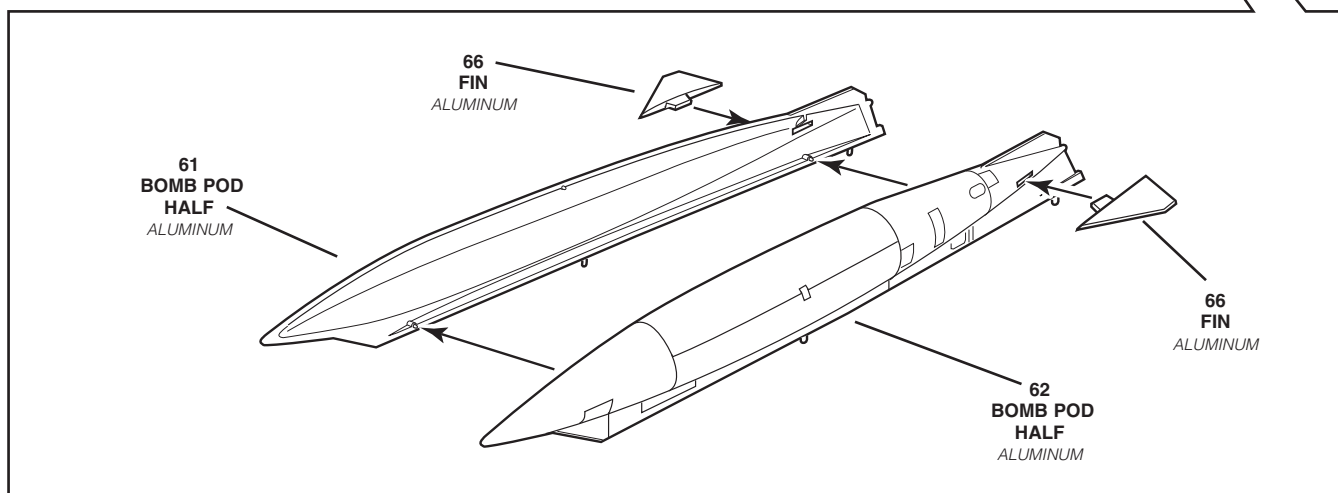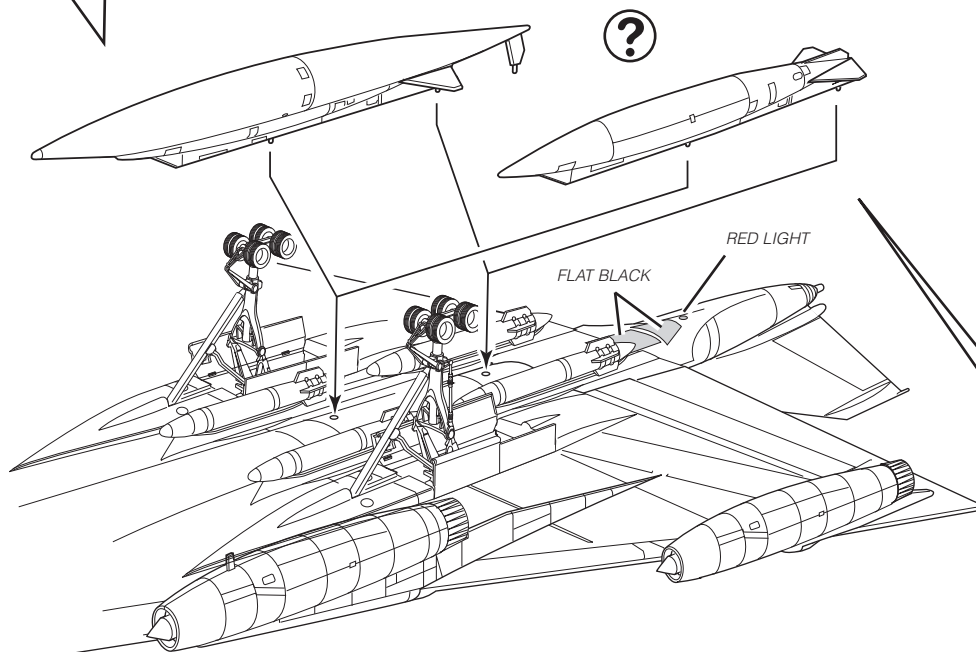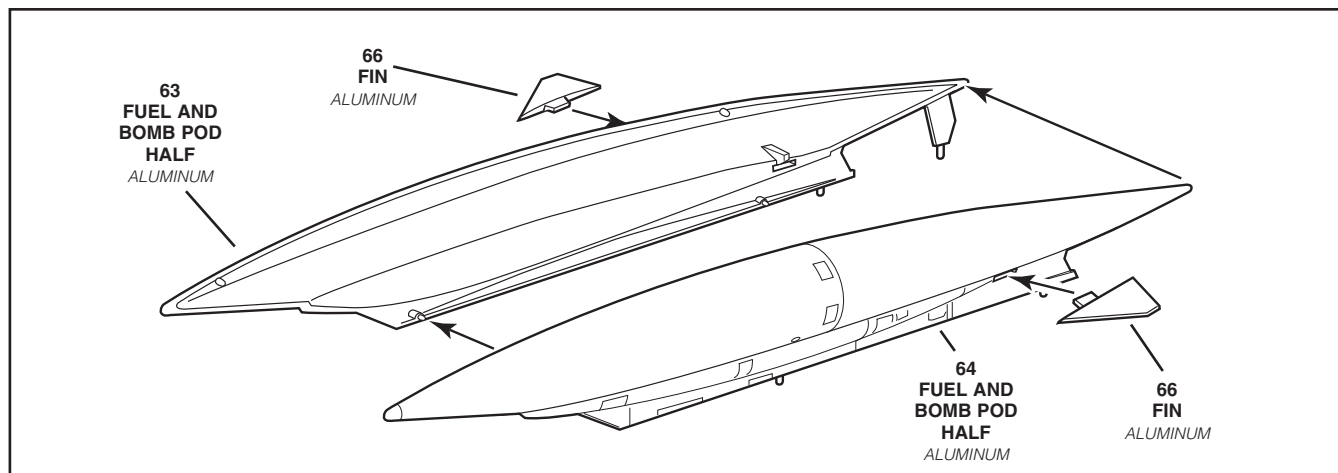


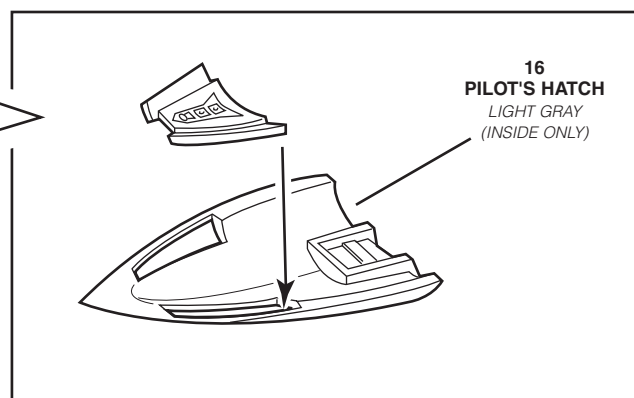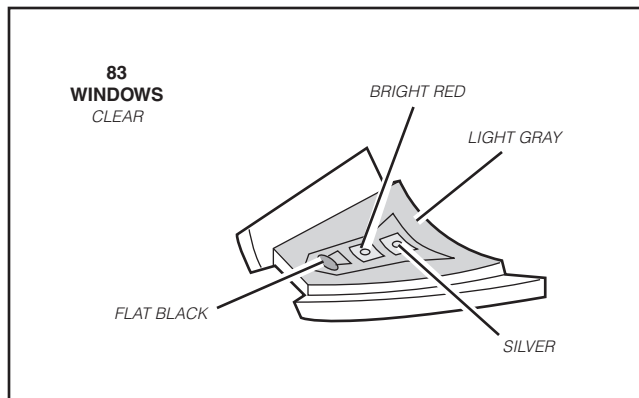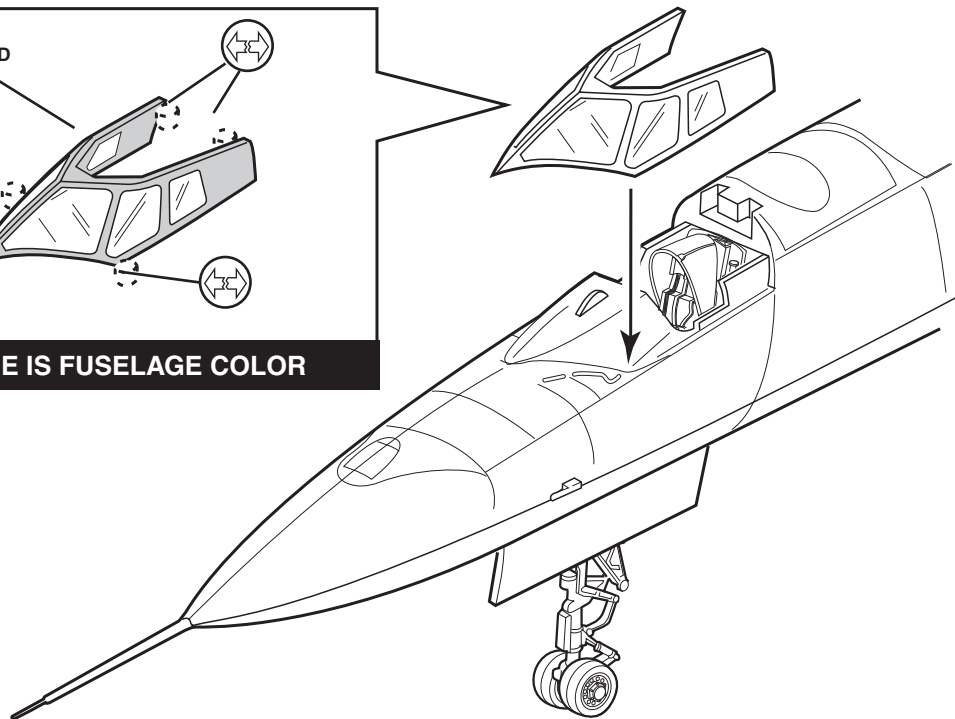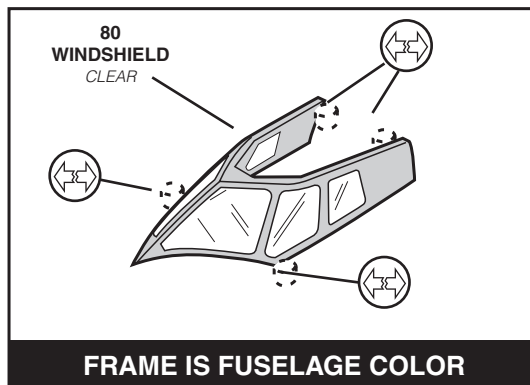

CLOSED HATCH

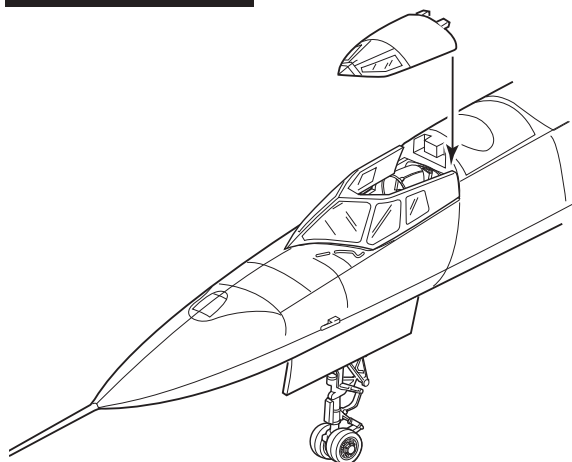


OPEN HATCH

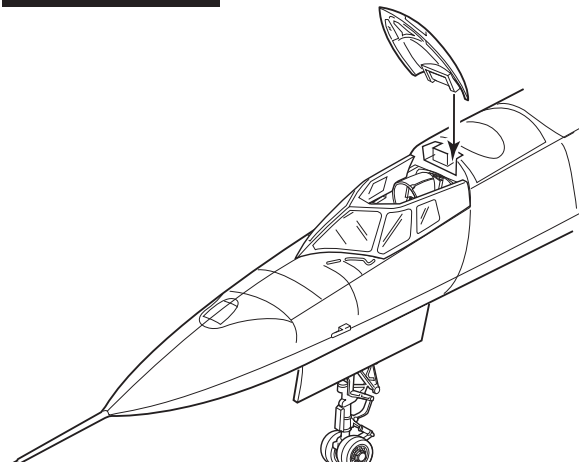

CONVAIR B-58A, 61-2059 "GREASED LIGHTNING", 305TH BW
SET SPEED RECORD OF 8 HOURS, 35 MINUTES BETWEEN
TOKYO AND LONDON, OCTOBER, 1963. AVERAGE SPEED: 938 MPH.

PAINT COLORS

AL	ALUMINUM	FA	FLAT ALUMINUM
FB	FLAT BLACK	ST	STEEL
FW	FLAT WHITE		

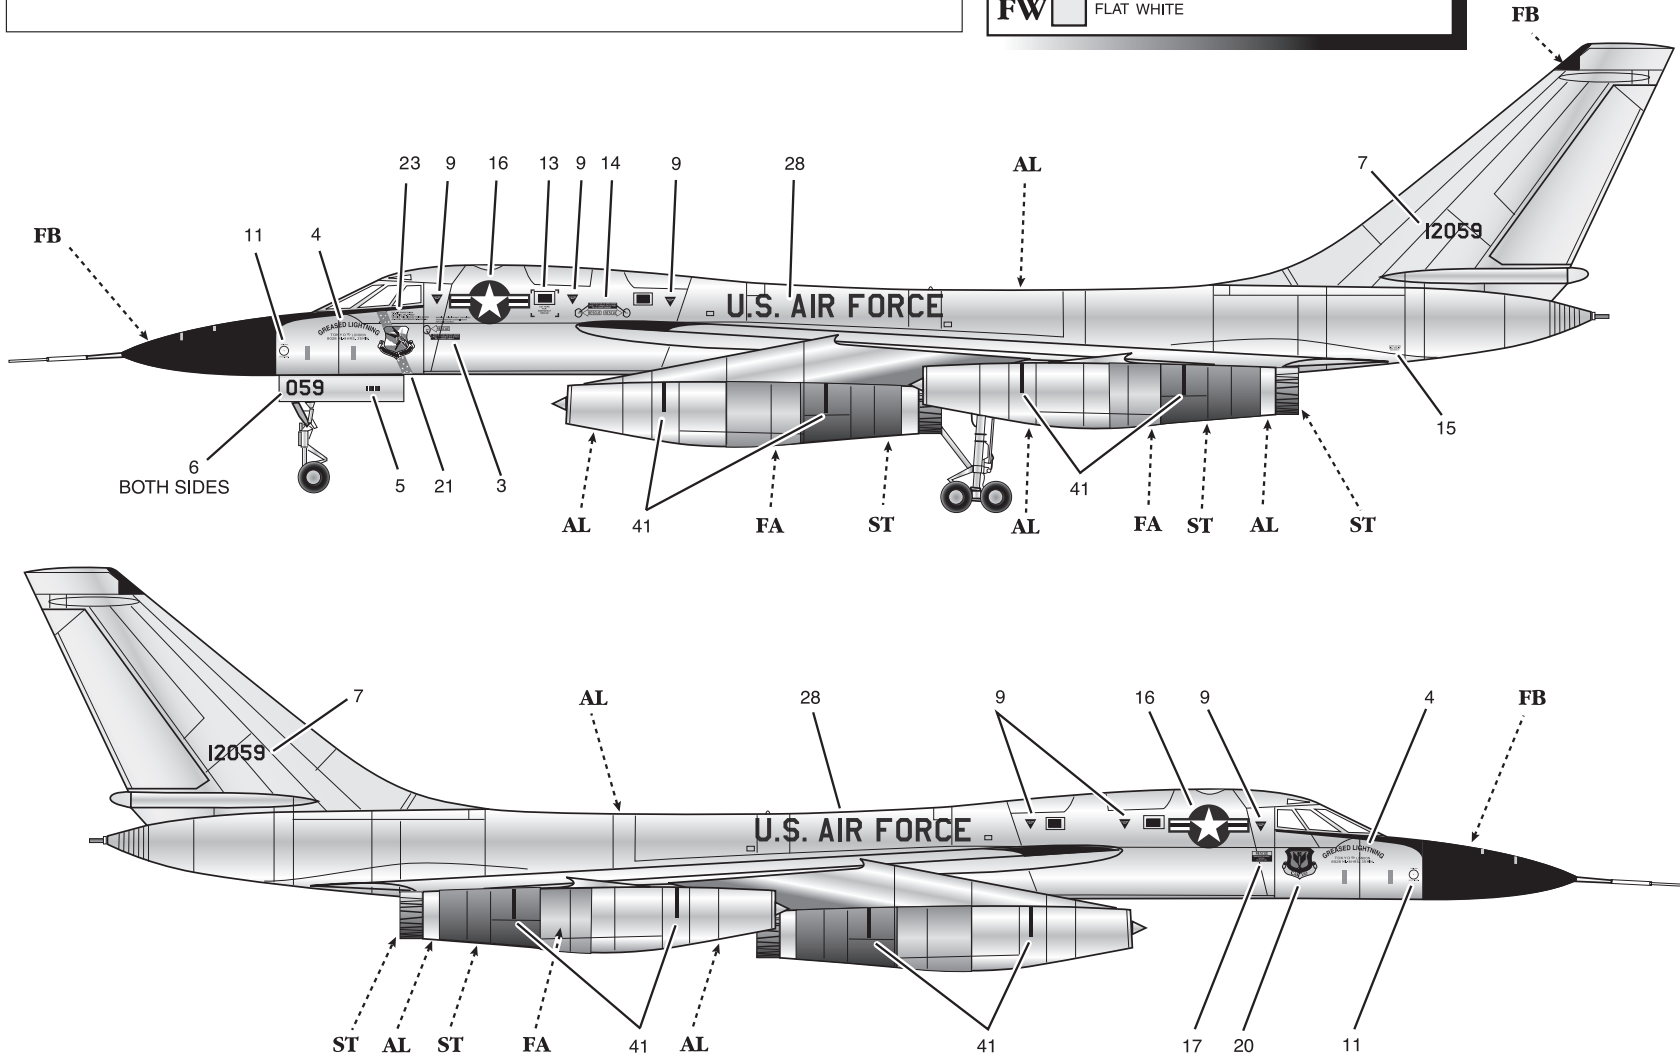


**CONVAIR B-58A, 58-1015 "GINGER", EDWARDS AFB, CA. SET FIRST SUSTAINED MACH 2 FLIGHT.
SEATTLE TO CARSWELL AFB, 70 MINUTES AT AVERAGE SPEED OF NEARLY 1,320 MPH.
OCTOBER 15, 1959**

PAINT COLORS


AL  ALUMINUM **FA**  FLAT ALUMINUM



FB  FLAT BLACK **ST**  STEEL

FW  FLAT WHITE

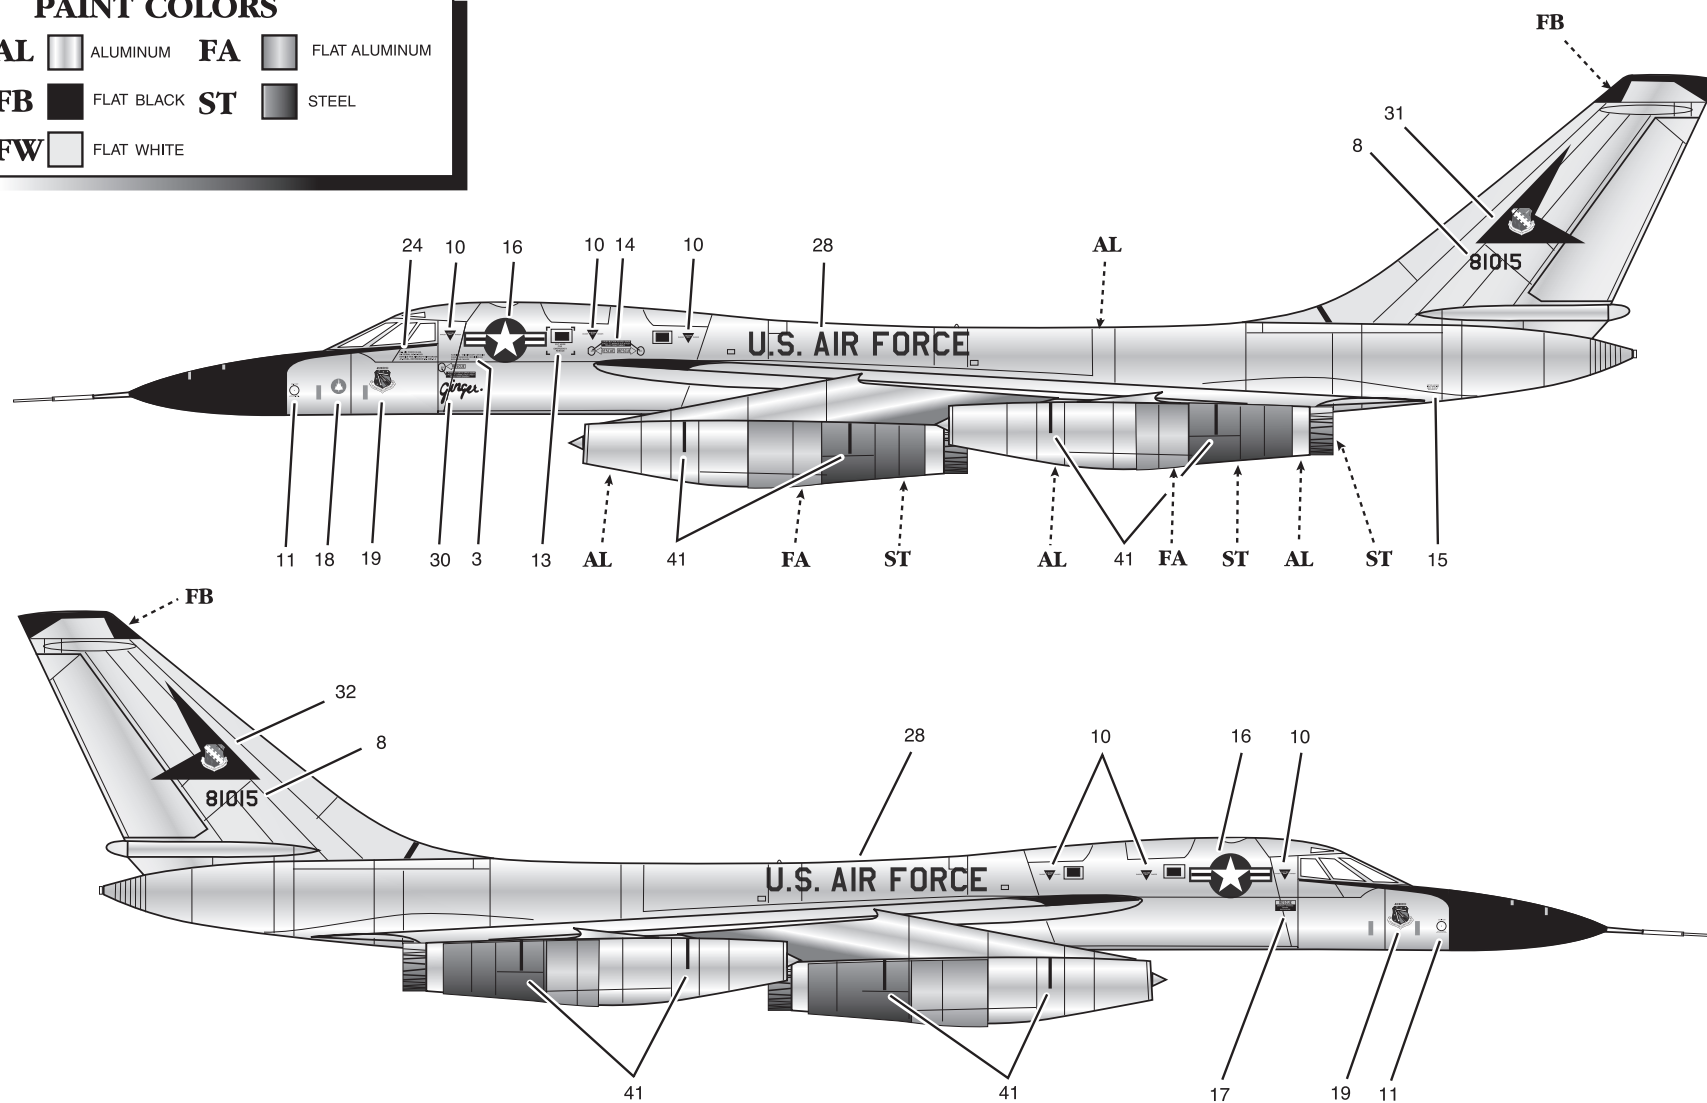

AL		ALUMINUM	FA		FLAT ALUMINUM
FB		FLAT BLACK	ST		STEEL
FW		FLAT WHITE			

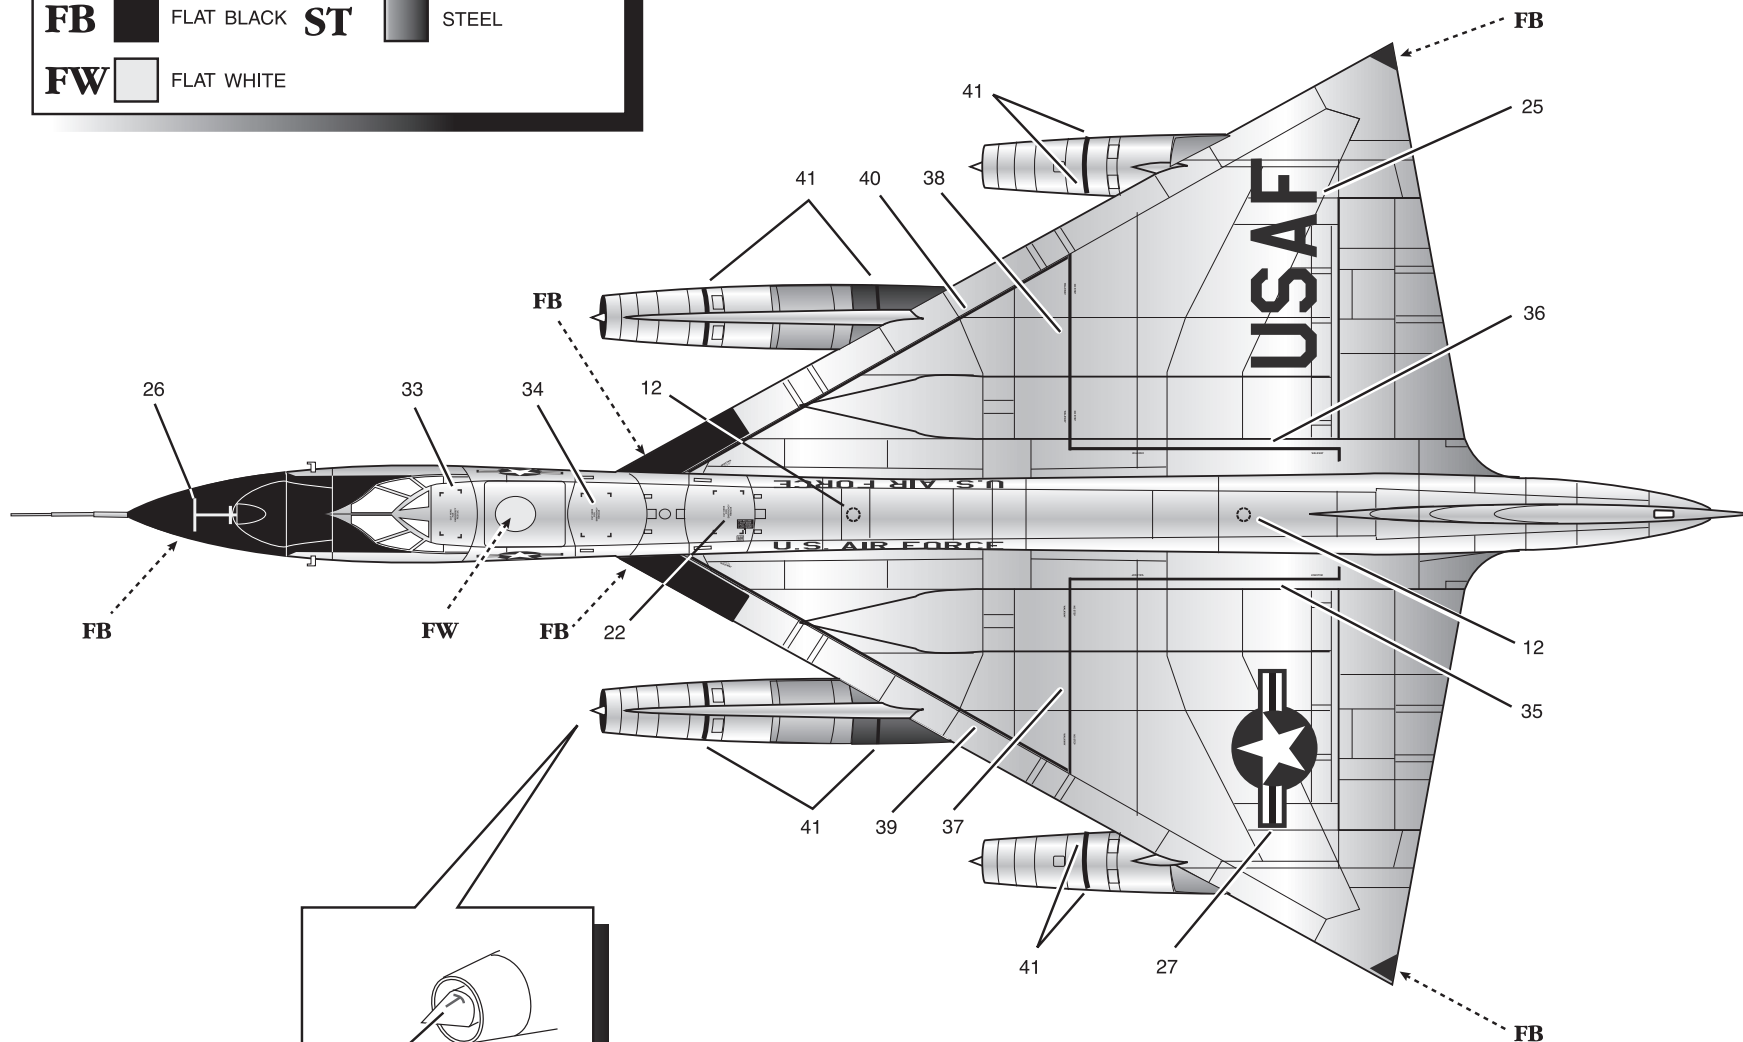

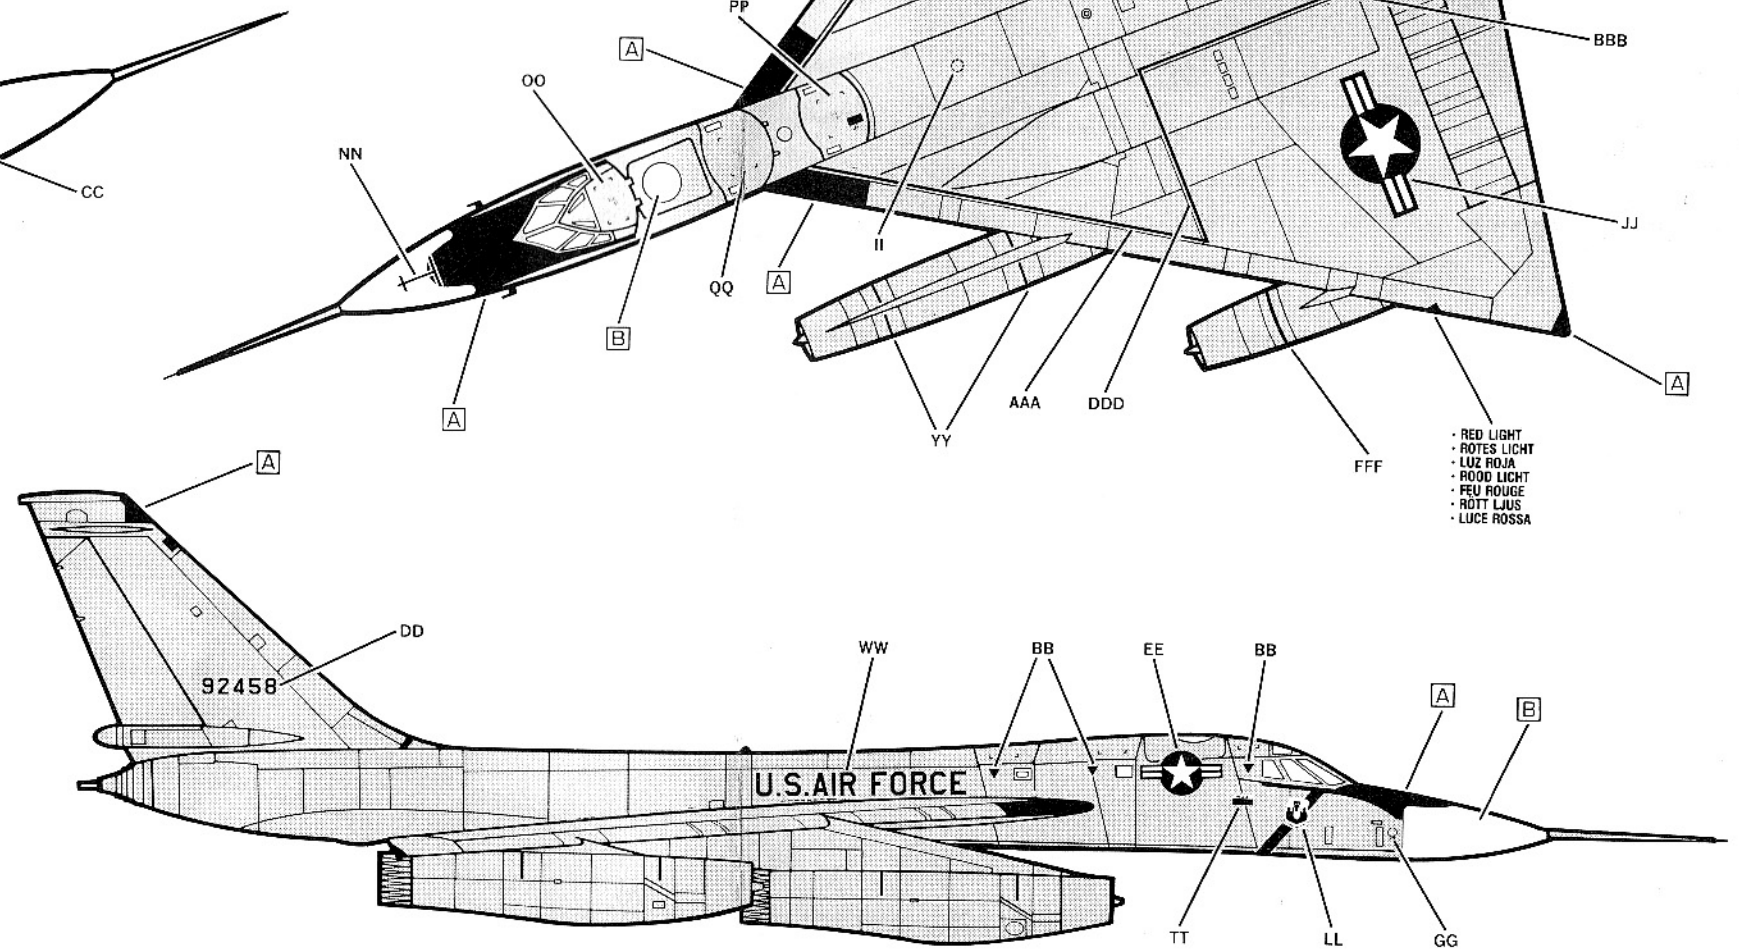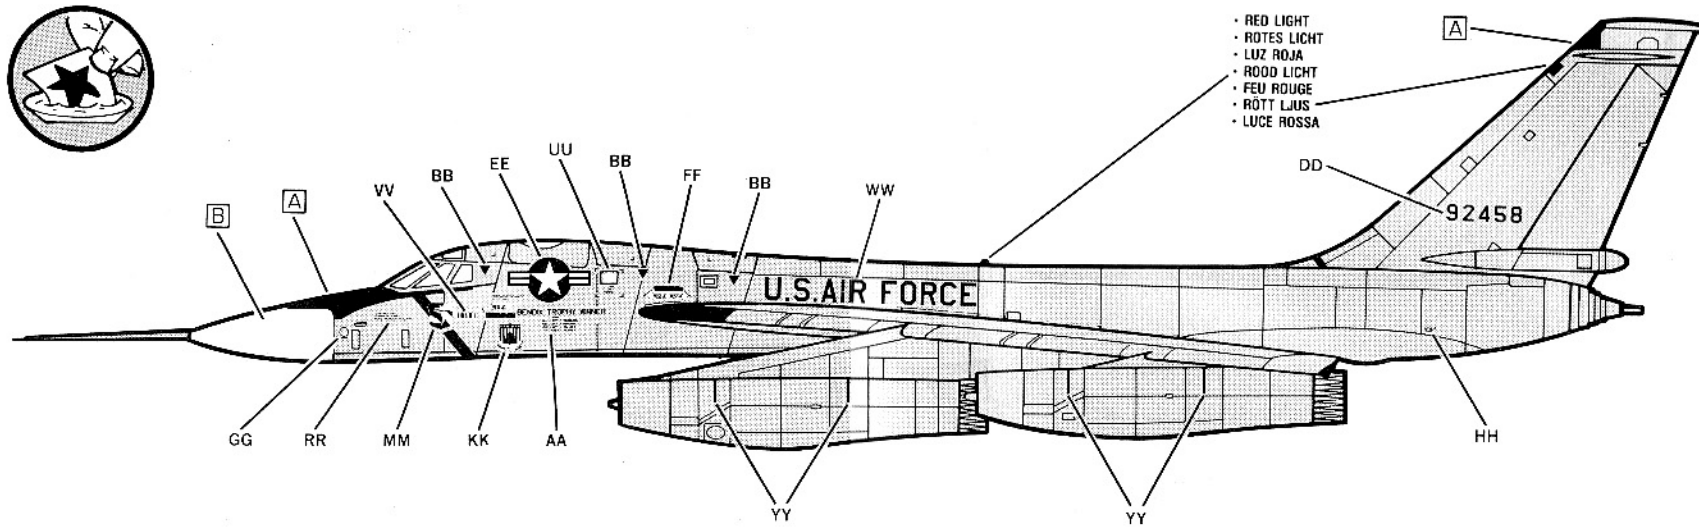

AA

WARNING: THIS AIRCRAFT CONTAINS AN
EJECTOR SEAT. EJECTOR SEAT CONTAINS AN
EJECTOR CHARGE.

RESCUE

BENDIX TROPHY WINNER

MARCH
A/C CAPT. R. SOMERS
NAV. CAPT. R. McDONALD
DSO CAPT. J. WALDEN
C/FC MSGT. CUCKWELL

SPEED 1214.73 MPH

BB

CC

2458
2458

DD B-58A HUSTLER 5704-0300

9245892458

EE

FF

JJ

GG

KK

LL

MM

NN

PP

UU

VV

QQ

RR

SS

U.S. AIR FORCE B-58A
A.F. SERIAL NO. 59-2059-A
SERVICE THIS AIRCRAFT WITH GRADE
20-8 FUEL, REFERENCE T.O. 4301-1-14

WW

U.S. AIR FORCE
U.S. AIR FORCE

USA F

XX

YY

AAA

BBB

DDD

CCC

FFF

EEE

ZZ

WALKWAY

WALKWAY

WALKWAY

WALKWAY

WALKWAY

WALKWAY

WALKWAY

WALKWAY

WALKWAY


WALKWAY

WALKWAY

WALKWAY

CUT HERE
FOR
EMERGENCY
RESUECUT HERE
FOR
EMERGENCY
RESUECUT HERE
FOR
EMERGENCY
RESUE

WALKWAY

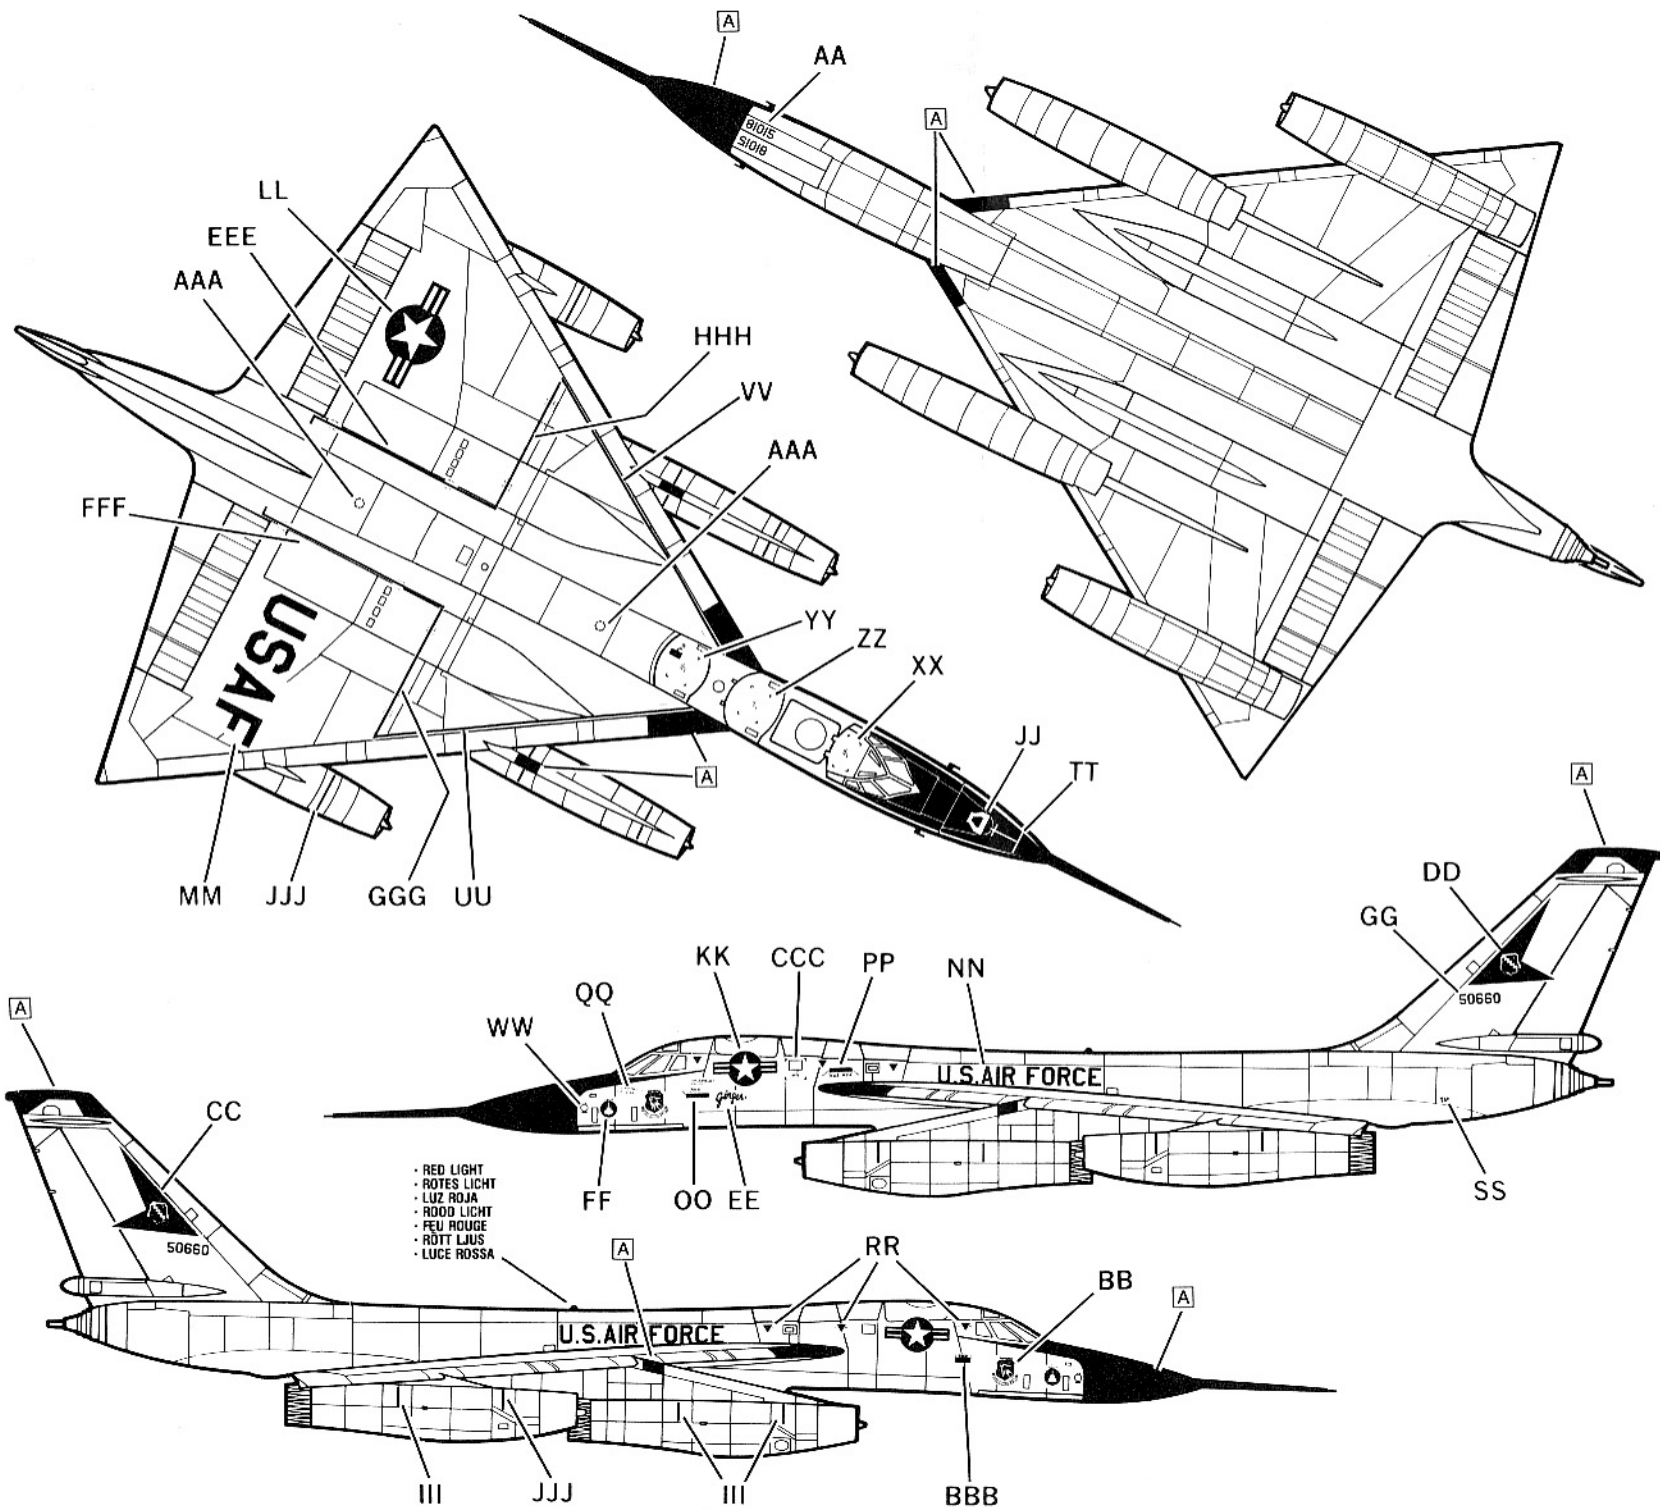

MONOGRAM®

B-58 HUSTLER

KIT 5705

1/48 SCALE MASSTAB 1:48 ESCALA 1:48 SCHAAL 1:48 1/48 ECHELLE SKALA 1:48 SCALA 1:48

MONOGRAM MODELS, INC. Morton Grove, Ill. Copyright © 1985, 1989. All rights reserved. Made in U.S.A. 5705 M 0200



REPEAT SEVERAL TIMES
ARBEITSGANG MEHRMALS WIEDERHOLEN
REPETA VARIAS VECES
TWICE AGAIN REPEAT
A REPETER PLUSIEURS FOIS
ARBEITSMOMENT SOM UPPREPAS
RIPIETI DIVERSE VOLTE



REMOVE AND THROW AWAY
ENTFERNEN (ABFALL!)
LUTTE Y TIRE
VERWUURDEN EN WEGGOEDEN
A RETIRER ET JETER
AVLAGNAS OCH MARKULERAS
RIMPOUVEDI ELIMINA



DECAL (DIP IN WATER)
ABZEHLEN
DECALCOMANIA (MOJE CON AGUA)
TRANSFERS (IN WATER OR ON)
DECALCOMANIE (A PLONGER DANS L'EAU)
DEKAL (DOPPAS I VATTEN)
DECALCOMANIA (IMMERGI IN ACQUA)



DO NOT CEMENT
NICHT KLEBEN!
NO USE PRIMER
NIET LIJMEN
NE PAS COLLER
LIIMAS INTE
NON INDELLARE



ALTERNATIVE ASSEMBLY
EINE ANDERE MÖGLICHKEIT
ENSAMBLE ALTERNATIVO
ANDERE WIJZE VAN SAMENSTELLING
ENSEMBLAGE ALTERNATIVE
ALTERNATIV SAMMANSÄTTNING
ALTERNATIV DI MONTAGGIO



OPTIONAL PARTS
BAUTEILE NACH WAHL
PIECES OPTIONALES
KLUZE ONDERDELEN
PIECES EN OPTION
VALTIVA DELAP
PARTI FACOLTATIVE

Every effort has been made to create and manufacture a model kit that is the finest available. If a problem should occur in assembly, or parts may be missing, please dial 1-312-390-8940 and ask for Monogram Customer Service. If writing, be sure to include the kit number, part number, and your return address, and send it to:

Monogram Models, Incorporated
Customer Service Department
363 North Third Avenue
Des Plaines, Illinois
60016

