



f DEEP CLEANING

Please be very careful !




According **a** to clear,


[1] Remove the handle and loosen the locking nut that allows the needle to be pulled out. (please do it carefully)




[3] Remove the needle cap , nozzle cap and nozzle.



[2] Using a paper towel dip some Clean solution, clean the needle several times from back to front until there is no residual paint on the needle.

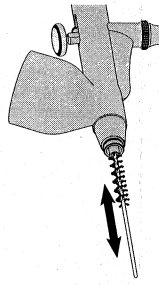


[5] Clean the inside of the airbrush by using cleaning tools with clean solution.




[6] Put the nozzle back carefully and tighten it carefully !

[7] Gently reinstall the needle to avoid hitting the needle's front end. Water spray test is recommended after assembly.


g ADD LUBE

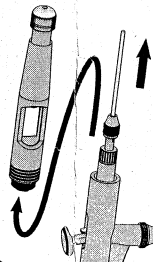

Remove the handle and loosen the locking nut that allows the needle to be pulled out. (please do it carefully)

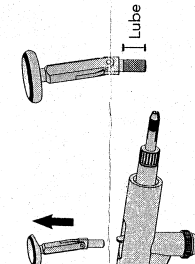

Remove the main lever, and apply a small amount of lubricating oil to the bottom.



Pull the Locking nut back and load the main lever back. Be careful not to tip the lever Guide. Install the needle and handle back after testing smoothness.

GA AHLERI


QUICK START GUIDE

For Gaahleri Airbrush CS-36 , GHAD-39 , GHAC-98

MATTERS NEED ATTENTION

1. Please do some small test on paper before painting. Use a little paint or water.
2. When you don't use the airbrush for a long time, please clean the airbrush totally and carefully. It will keep the airbrush in storage of good conditions.
3. Please use clean solution for cleaning.
4. After finishing the work, please clean the airbrush.
5. Please clean the needle and the nozzle carefully. Otherwise, it may cause poor spraying effect or product damage, even hurt yourself.
6. Do not spray noxious, flammable, explosive material.
7. All Gaahleri airbrush is already pre-installed and full tested. If you have any question, please contact us through the email address provided at the end of manual.

1 BEGIN

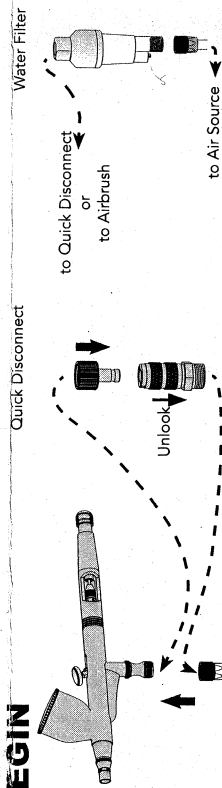

to Air Source
Attaching the end of an airbrush hose to your airbrush.


Quick Disconnect

to Quick Disconnect or to Airbrush


Water Filter

to Air Source
If you have a water filter, it can filter moisture from the air.

2 PAINT

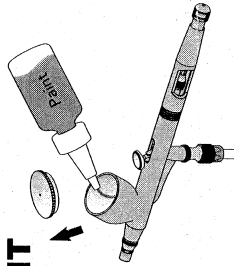


Open the lid and pour paint to the pot. Some paints need to be diluted first. It is recommended to dilute them like milk.

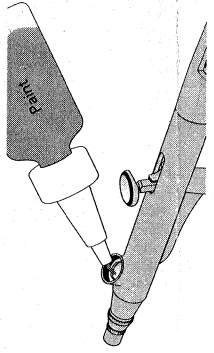


If you have a detachable pot, you can pour a little paint into the pen to get a better view for more detailed painting work.

3 START AIRBRUSHING

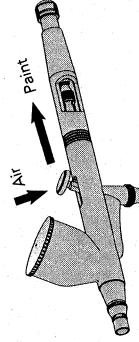

Turn your air compressor on. Press the main lever first to release air, and the more you pull back, the greater the amount of paint that comes out.

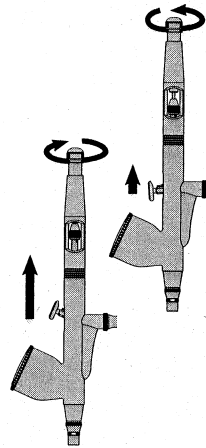

When spraying thin lines, if the pen tail has preset fluid control knob, you can turn the knob to limit the maximum quantity of spray.

Brand : Gaahleri

Product Name : Gravity Feed Airbrush

Company Name : Ningbo Gaile Network Technology Co., Ltd.

Store : Gaahleri airbrush store


Email Address : gaahleri@outlook.com

Follow Us on : Twitter/Instagram/Facebook/YouTube: Gaahleri Airbrush


GA AHLERI

4


PERFECT SPRAYING EFFECT



Too thick.



Perfect



Too thin.


Reduce air pressure,
or
Add undiluted
paint.

Dilute paint with
thinner.

Q&Ans- CONTENTS

- a** HOW TO SWITCH COLOUR
- b** LARGE PARTICLES OF PAINT FLY APART
- c** WHEN AIR REVERSE FLOW INTO THE POT
- d** UNABLE TO SPRAY PAINT
- e** WHEN THE TRIGGER CANNOT BE PULLED BACKWARDS
- f** DEEP CLEANING
- g** ADD LUBE


a HOW TO SWITCH COLOUR

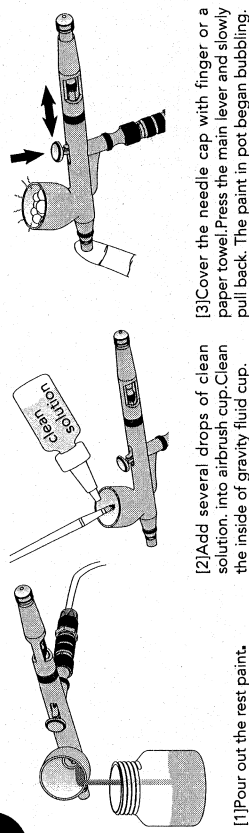


[1] Pour out the rest paint.

[2] Add several drops of clean solution, into airbrush cup. Clean the inside of gravity fluid cup.

[3] Cover the needle cap with finger or a paper towel. Press the main lever and slowly pull back. The paint in pot began bubbling.

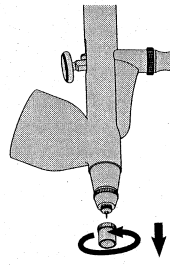


Remove the needle cap.




Dip some clean solution and clear the inside of needle cap.


b LARGE PARTICLES OF PAINT FLY APART



c WHEN AIR REVERSE FLOW INTO THE POT

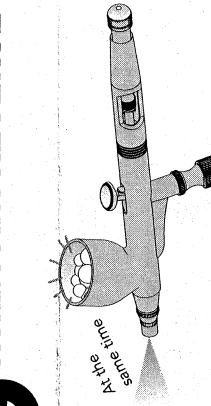


When the main lever is pulled, the paint in pot start to bubble and even come out of the pot.

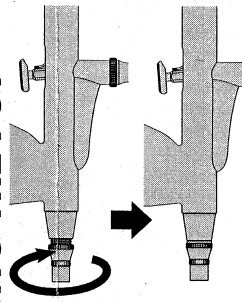


Please try tighten the nozzle cap.


d UNABLE TO SPRAY PAINT

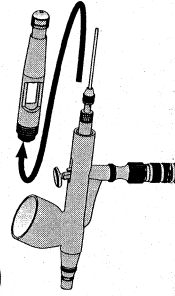

Remove the handle.




Push the needle to the headmost with a little bit of pressure firm but not like Jabbing. Then tighten the needle chucking nut.

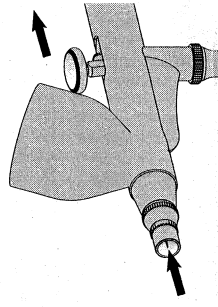


Pull back the main lever to check whether the needle has moved.


e WHEN THE MAIN LEVER CANNOT BE PULLED BACKWARDS

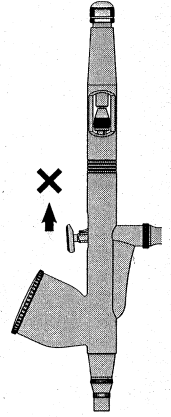


Check whether adjust knob is tight and try to open the limiter.

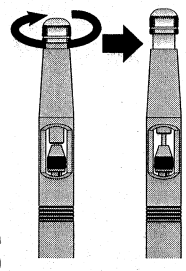

If it still cannot be pulled, the paint may have dried in the pen because it was not cleaned last time. Deep cleaning is needed at this time.

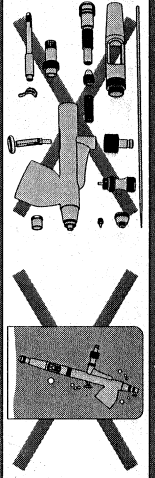

Complete disassemble airbrush is usually not required.



Clear the needle cap with clean solution.

[3] Pour the cleaning solution into the waste collector. Repeat steps [2] to [4] until the liquid in pot is clear, and the liquid that comes out is colorless. A Gaahlert airbrush cleaning pot is recommended.

Do not put the whole airbrush into the clean solution!