


M4A3E8 SHERMAN

KIT NO. 30018

1/35 IDENTICAL SCALE SERIES

★ FULLY MOTORIZED ★ EASY TO ASSEMBLE

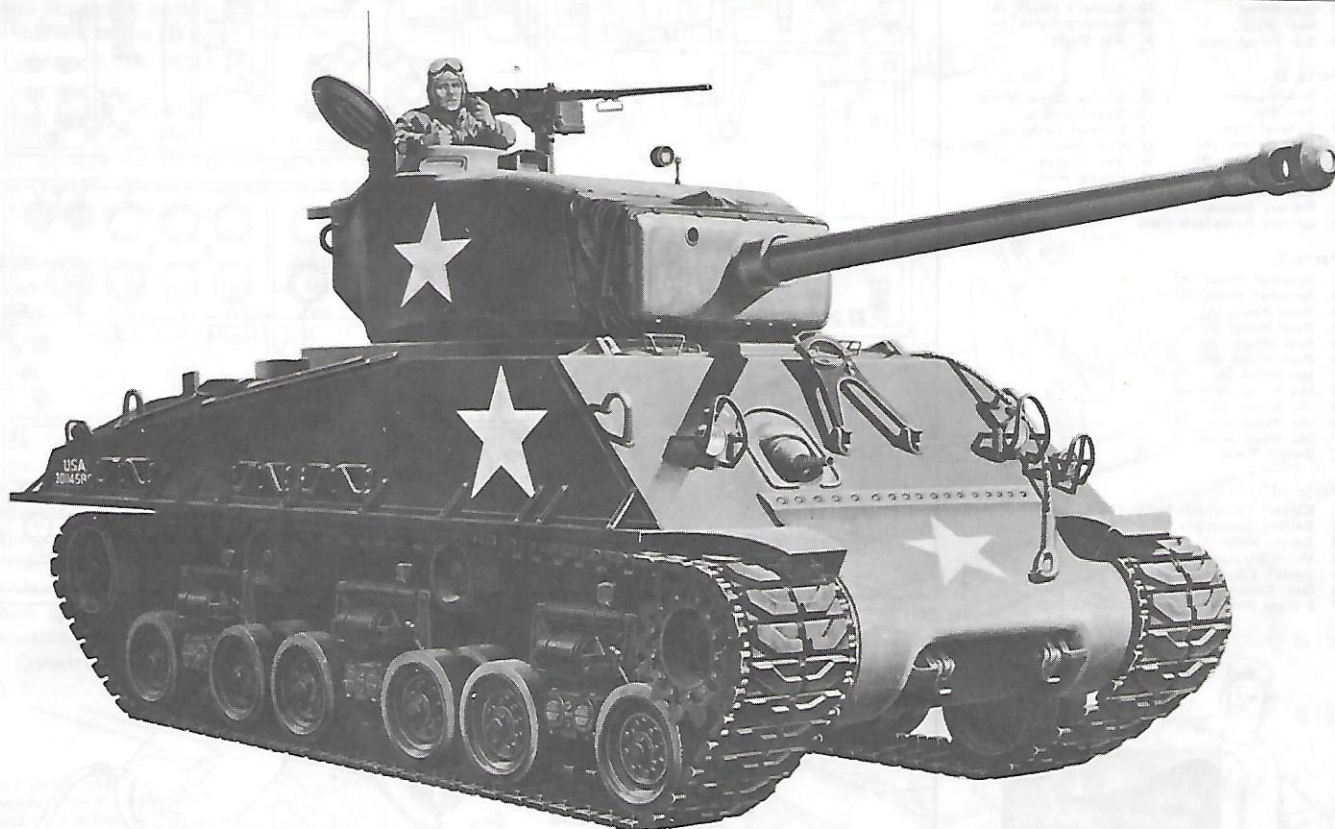

Since Normandy landing, the U.S. forces marched forward to Germany, carrying away all Germans before them until in December, 1944, they suffered a crushing defeat at the Ardennes region in France under the fierce counterattack by the enemy ("Battle of the Bulge"). The U.S. 101st Airborne Division and the 10th Armoured Corps were critically surrounded at Bastogne by the German forces when they got out of danger with the aid of the 3rd Army which rushed to the scene when informed of their critical situation.

With the success of this rescue operation,

the U.S. forces were able to have a chance to restore their falling fortunes.


Right at this critical juncture, the M4A3 E8 Sherman tank, the newest type of the M4 medium tank, made a gallant appearance at the spearhead of the 3rd Army under the command of Lieutenant General Patton, who was said to be the most gifted with a superhuman skill in fighting battles of armoured forces among All the U.S. Army Commanders.

There are more than 30 different types of the M4 Sherman medium tank including the T-6 manufactured for trial, the M4 officially adopted in October, 1941 and the M4A3 adopted in 1942. The M4A3E8 especially which crowned its first campaign with success and gave a chance for the surrounded U.S. forces to gain victory, differed greatly from a series of the former Shermans in its reinforced equipments. It was equipped with a large revolving gun turret, a 76mm gun of high initial speed and a new level suspension device. It was, in fact, the last type of the M4 tank series.


The number of the M4A3E8 produced at the Chrysler's tank plant in Detroit, which had also been called "Easy Eight", amounted to 1445 during the period from September, 1944, to January, 1945. Besides, most of 1,925

M4A3s each equipped with a 76mm gun had been remodelled into the M4A3E8 type during the Korean war, replacing their narrow-gauged caterpillars and vertical suspension devices with wide-gauged and level ones respectively. It is also said that at about the same time,


M4A3




M4A3E8




M47

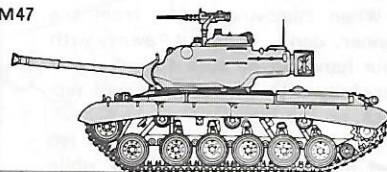

M48

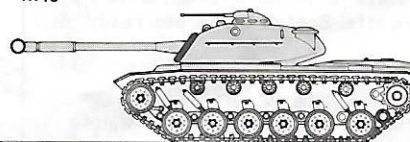

Type 61



1/35 シングル シャーマン(英)

PARTS

Parts, A

- | | |
|---------------------------|-------------------------|
| 1. Tail Light | 16. Hull Front Hook |
| 2. Small Front Light | 17. Commander's Hatch |
| 3. Fire Extinguisher, (A) | 18. Antenna Base |
| 4. Fire Extinguisher, (B) | 19. Rotary Ring |
| 5. Light Cover, (A) | 20. Gun Barrel Support |
| 6. Light Cover, (B) | 21. Front Armour |
| 7. Searchlight | 22. 7.7mm Machine Gun |
| 8. Large Front Light | 23. Bullet Case |
| 9. Gun Barrel Stopper | 24. Machine Gun Holder |
| 10. Travel Rack, (C) | 25. Ventilator |
| 11. Travel Rack, (A) | 26. Machine Gun |
| 12. Travel Rack, (B) | 27. Machine Gun Support |
| 13. Gun Barrel | 28. Gunner's Hatch, (A) |
| 14. Rear Hook | 29. Gunner's Hatch, (B) |
| 15. Gun Turret Hook | 30. Gun Shield |

Parts, B



- | | |
|-----------------------------|--------------------------|
| 1. Switch Lever | 10. Auxiliary Rear Wheel |
| 2. Tool Box | 11. Rear Panel |
| 3. Exhaust Pipe | 12. Exhaust Deflector |
| 4. Rear Fender, (A) | 13. Rear Hook |
| 5. Rear Fender, (B) | 14. Gear Stopper |
| 6. Suspension, (A) | 15. Hauling Hook |
| 7. Suspension, (B) | 16. Suspension Parts |
| 8. Battery Stopper | |
| 9. Battery Receptacle Plate | |

Parts, C

1. Sprocket Wheel, (A)
2. Sprocket Wheel, (B)
3. Road Wheel, (A)
4. Road Wheel, (B)
5. Road Wheel, (A)
6. Road Wheel, (B)
7. Idle Wheel, (A)
8. Idle Wheel, (B)
9. Idle Wheel, (C)
10. Idle Wheel Shaft, (A)
11. Idle Wheel Shaft, (B)
12. Switch Parts

Parts, M

1. Battery Receptacle Metal, (A)
2. Battery Receptacle Metal, (B)
3. Switch Metal
4. Motor Stopper Vis
5. Switch Vis
6. Gear Stopper Vis
7. 8-blade Pinion

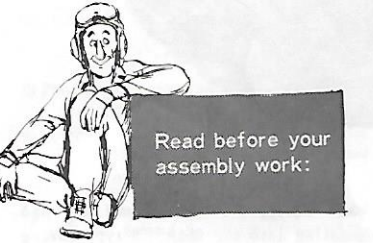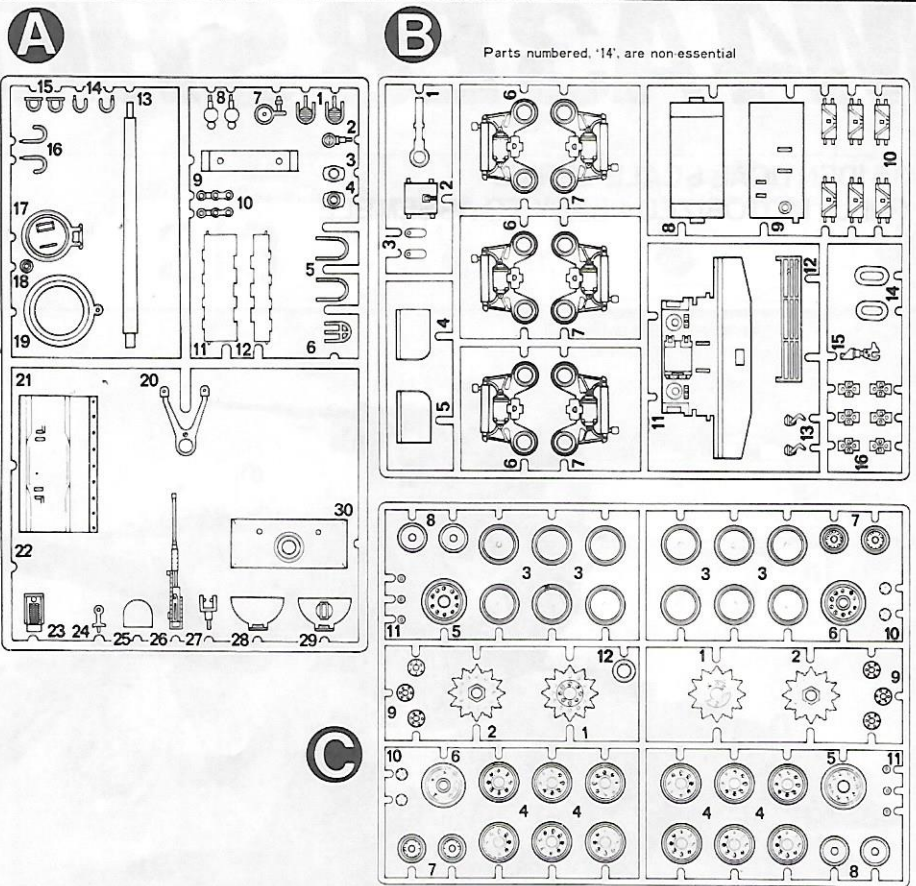

- ★ When constructing the model, don't do your assembly work in a hurry but be sure to read its instructions and see the particular cut well beforehand.
- ★ When removing parts from the runner, don't wrest it away with your hand but be sure to cut it off carefully with a knife, a pair of nippers, or the like.
- ★ When painting, do the easier job and paint the smaller parts while they are still on the runner.
- ★ Have a knife, a small driver, a pincette, Scotch tapes, etc. ready.

Fig. 1 Fixing of Pinion Gear
★ Drive RE 26 Motor Shaft into Pinion Gear with a 2mm gap in between.

Fig. 3 Connection of Cord to Metal
★ When connecting Cord to Metal, peel the vinyl casing off from the tip-end of Cord by about 1.5cm in length.

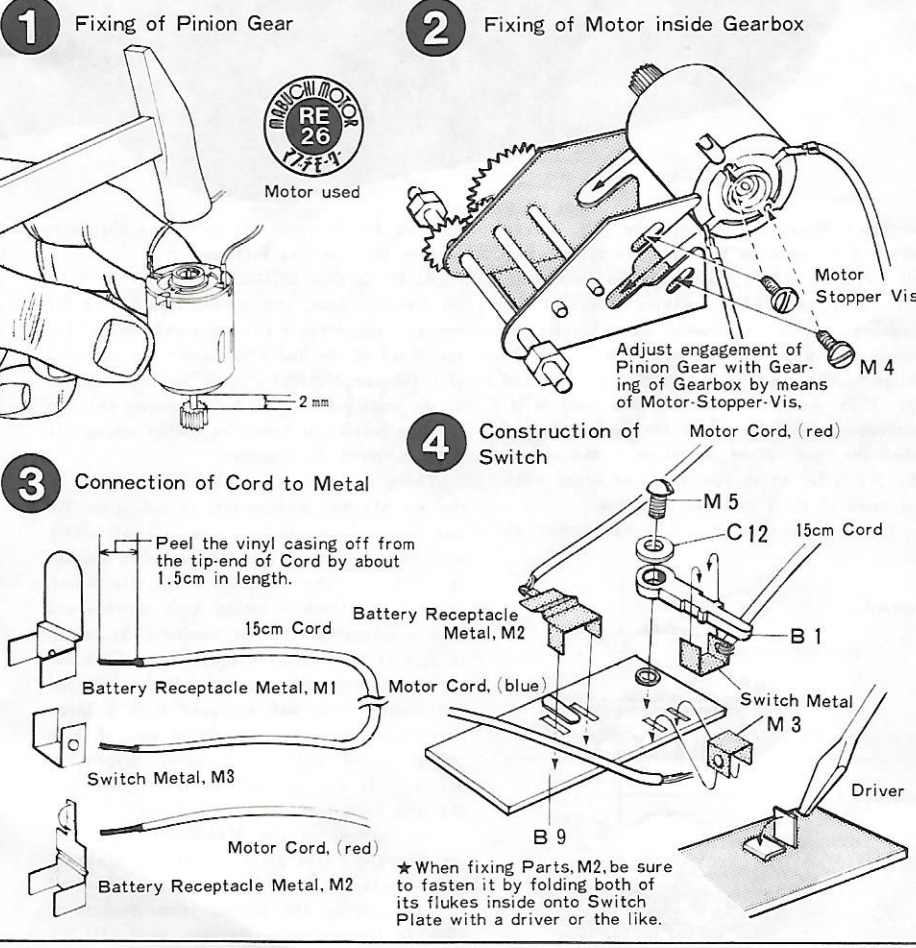


Fig. 5 Construction of Wheel & Rear Panel

★ In constructing Road Wheel, glue Parts, B16, onto Parts, B6 and B7, first. Then, glue Road Wheels, C3 and C4, together.

Note: In so doing, be sure not to let adhesives flow inside the holes of Parts, B6 and B7.

Fig. 6 Fixing of Gearbox

★ When fixing Rear Panel, fix it while spreading both walls of Lower Hull out in the arrowed directions as shown in the figure.

Fig. 7 Fixing of Wheels

★ When fixing Front-Hull-Parts, A21, be sure not to use adhesives but fasten it onto Lower Hull with Gear-Stopper-Vis.

★ When gluing Wheels onto Lower Hull, be sure not to let adhesives flow into the gap between Shaft and wheel.



★ The best way is to oil the movable parts.

★ In so doing, use either machine oil or grease for Gear box.



★ Use vegetable oil, which won't harm plastics, for those plastic movable parts such as Wheels.

Construction of Caterpillars


★ Flatten both pin-heads with the hot end of a driver.

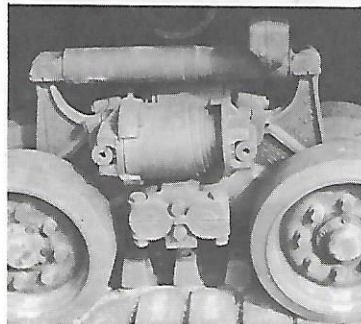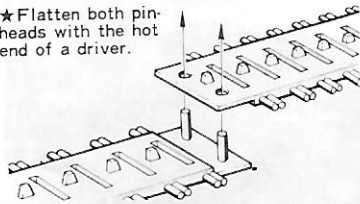

5 Construction of Wheel

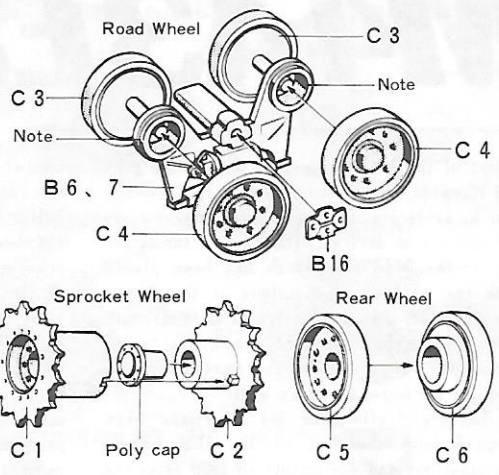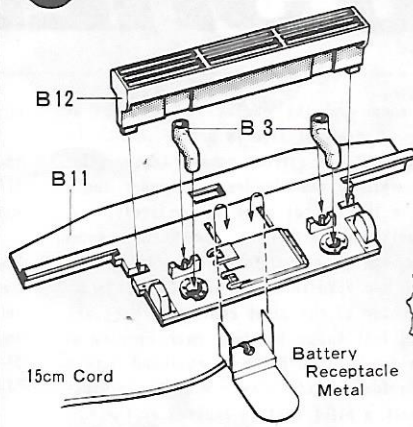

6 Fixing of Gearbox

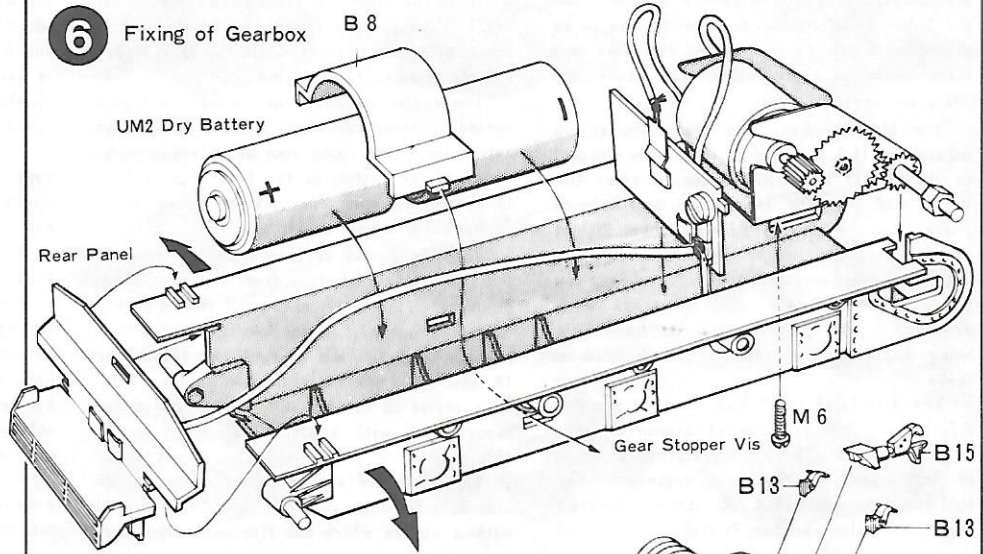

7 Fixing of Wheel

★ Fasten the loosened caterpillars by adjusting this Vis.


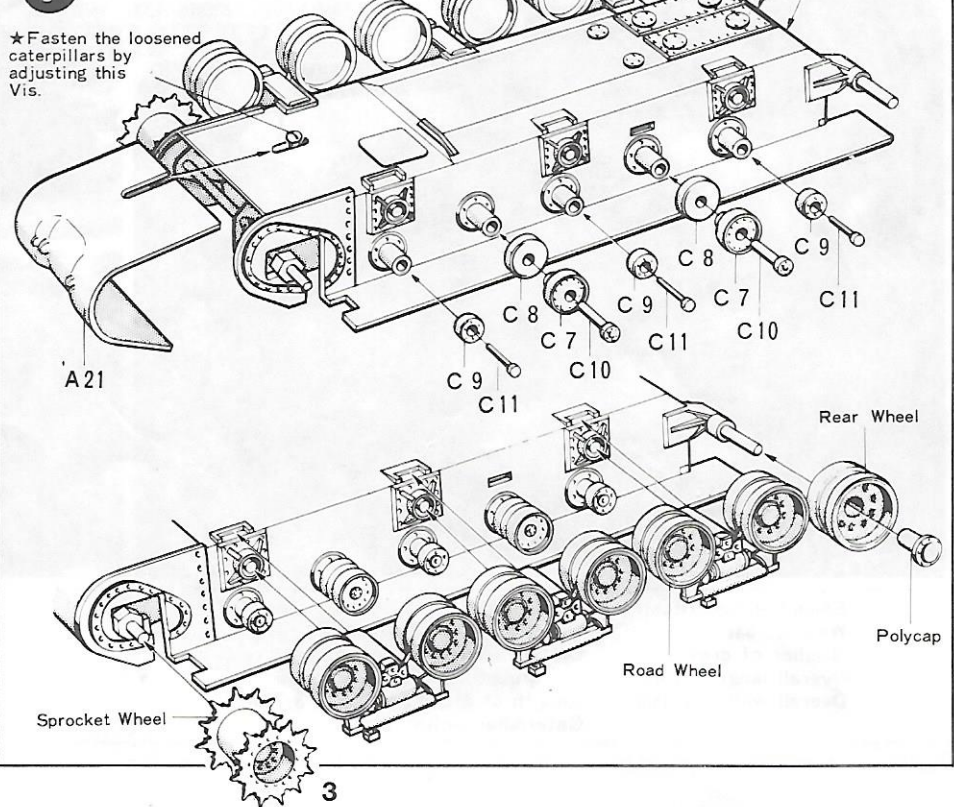


Fig. 9 Construction of Gun Turret, B

★When fixing Machine Gun, A26, onto MG Holder, A27, be sure just to fix them together without the use of adhesives. Do likewise with Parts, A17.



«How to make Antenna»




Heat a length of sprue. When melted a little, stop heating and pull to stretch it. Hold for about 15 seconds to cool and cut to proper length.




Fig. 11 Construction of Upper Hull, B

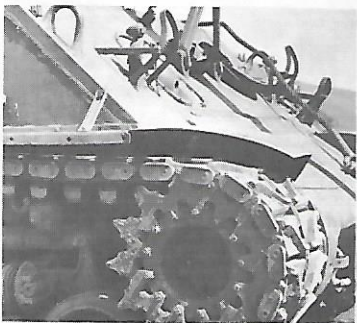


8 Construction of Gun Turret, A

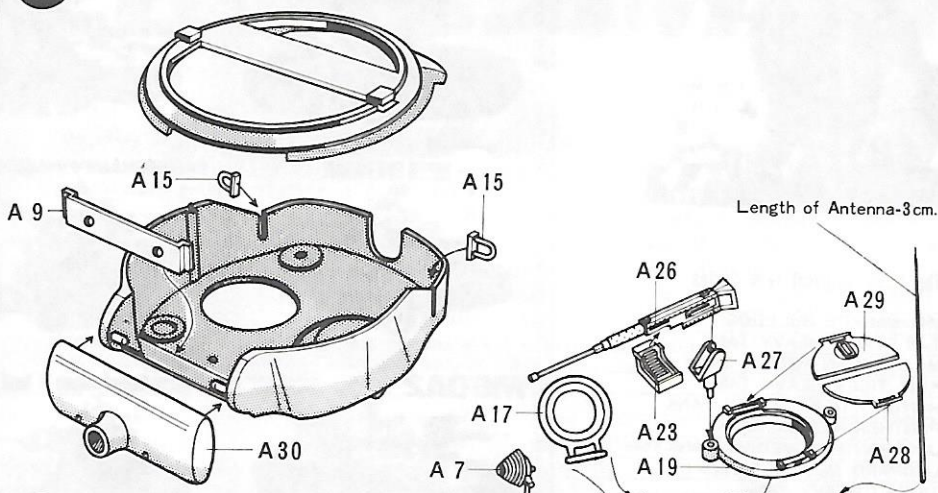

9 Construction of Gun Turret, B

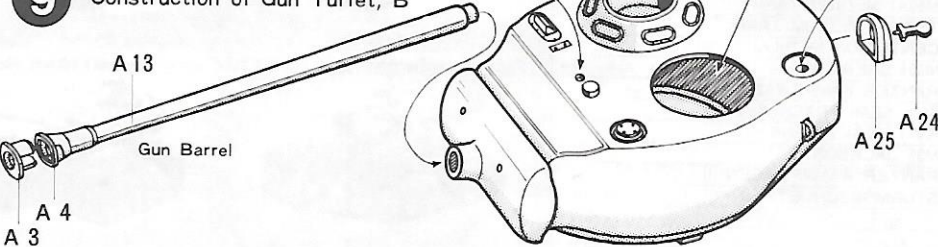

10 Construction of Upper Hull, A

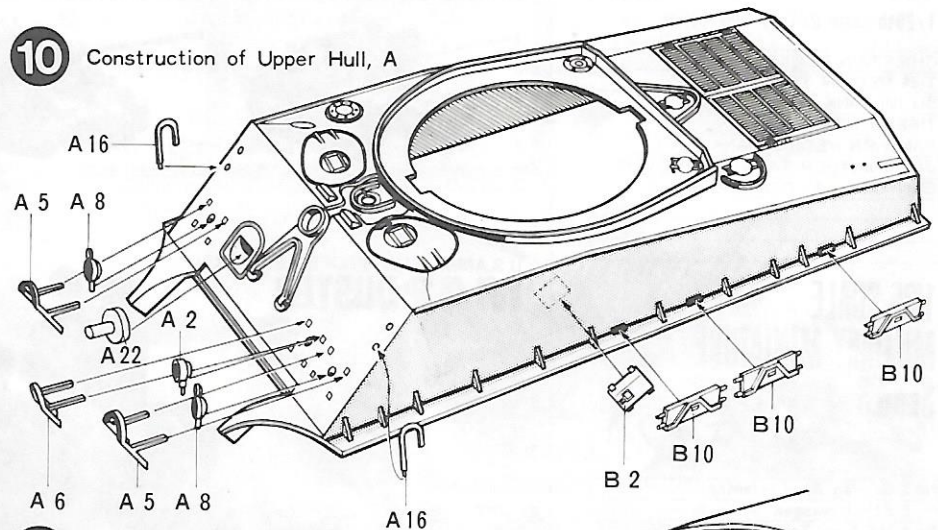

11 Construction of Upper Hull, B

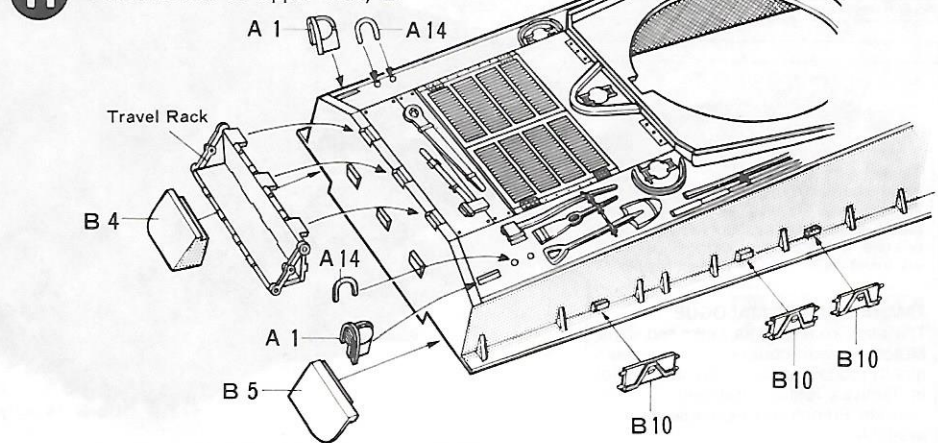


Fig. 11 Completion of Hull

★Firstly, fix Front Upper Hull onto Lower Hull as shown in the figure. Then, fix Rear Upper Hull onto Lower Hull with a snap. When removing Upper Hull from Lower Hull, push the former a little forward to take off its rear portion from the latter. Then unfasten the front portion.


★When fixing Gun Turret onto Upper Hull, fix the groove at the base of Gun Turret into that at of Upper Hull. Then, move Gun Turret around 90° and the model will be completed.

Construction of A Dummy

★There are two kinds of left arm — A-3 and A-4. Left Arm, A-3, is used to represent a tank leader holding a pair of field glasses with both hands, Left Arm, A-4, is used to show his hand touching periphery of Hatch.



11 Completion of Hull

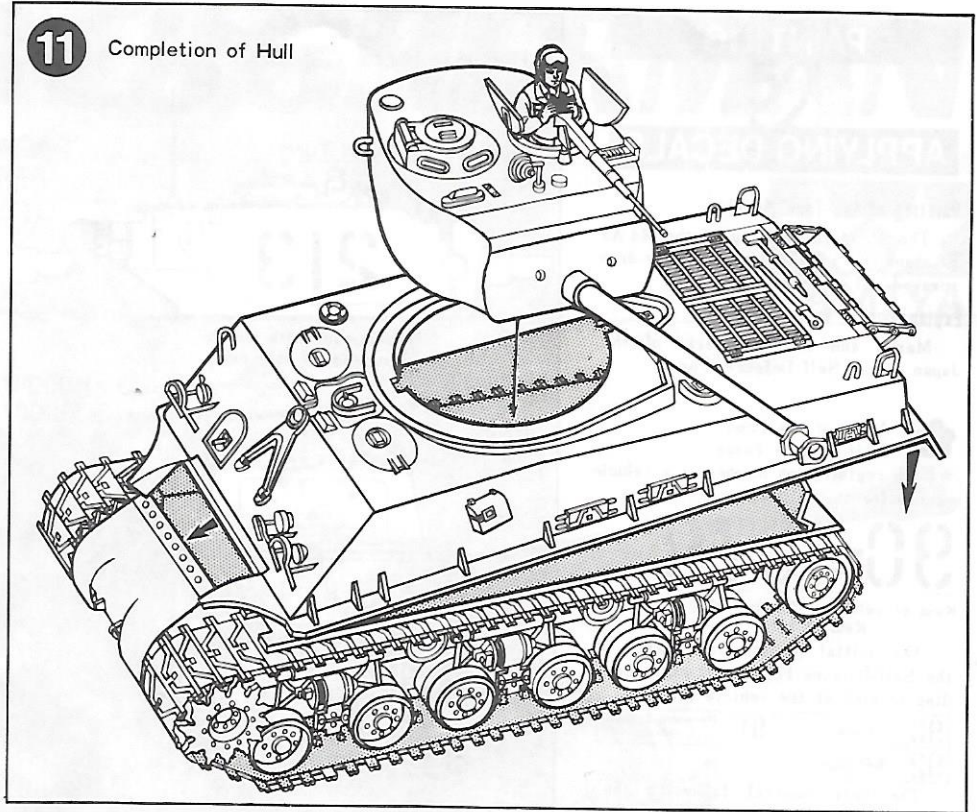

Picture of the completed model



The mark in front of the tank as shown in the picture of the completed model, was used for the tanks which belonged to the B Company of the 45th Tank Battalion.

This battalion was active in support operation of the U.S. 5th Infantry Combat Corps during the Korean war.

As for the B Company, it was dispatched as a single unit from the 6th Mechanized Division then in the U.S. to the Korean front in September, 1950, and actively engaged itself in pursuing the enemy from Pusan Beachhead to Hamhung together with the 1st Cavalry Division already there.

PAINTING



APPLYING DECALS

Painting of the Tank Model :

The standard painting of the M4 A3 E8 tank is a uni-colour of olive-drab sprayed all over its surface,

Explanation of Various Decals

Marks and Number Marks of the Japan Land Self-Defence Force.

Mark of the Land Self-Defence Force

★ Each registration number of a vehicle stands for the following :

90-3078

Kind of vehicle | Number of a battalion
Kind of tank

The initial registration number of the Self-Defence Force will vary according to kind of the vehicle involved;

| | | | |
|----|--------|----|-----------------------------|
| 90 | Tank | 91 | Personnel Transport Vehicle |
| 92 | SP Gun | | |

The next numeral following the initial number represents kind of the tank involved:

| | | | |
|----|---------------|----|--------------|
| -0 | M24 Tank | -2 | M41 Tank |
| -3 | M4 A3 E8 Tank | -6 | 61-type Tank |

078 This is one of serial numbers that begins from 001. "078", therefore, means that it is the 78th vehicle.
1師戦車-2中 This means that the vehicle belongs to the second Company of the 1st Division.

東方教団 This means "the East Training Corps".

機甲-2中 This is an abbreviation mark for the 2nd Company of the Mechanized Training Corps.

213 The figure stands for the No.3 tank that belongs to the 1st Platoon of the 2nd Company.

Explanation of Marks and Number Marks of U. S. Army.

4Δ4Δ73

This number mark should be read in the order of ①, ③ and ②. It means the 4th Battalion, the 73th Regiment, the 4th Mechanized Division.

A12 This means the No.2 tank of the 1st Platoon of the A Company.

2911348 This stands for the registration number of the vehicle.

CALIFORNIAN JANE

This is the nickname for the tank.

PAINT MARKER

Hand held, Tamiya enamel paint markers. For the final detail touch, and professional results. 12 of the most popular colors used in modeling. See and test them at your local hobby supply house.




The Japan Land Defence Force

Side View of Gun Turret





This number mark should be pasted on both sides

Side View of Gun Turret

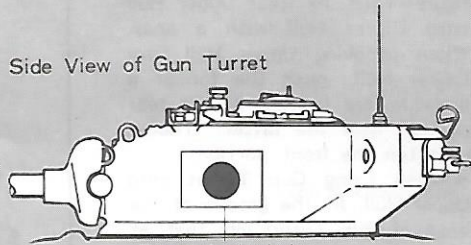


This mark should be pasted on both sides.

In case of 213: 90-3071
In case of 90-3078



東方教団
機甲-2中
In case of 213: 1師戦車-2中

U. S. ARMY

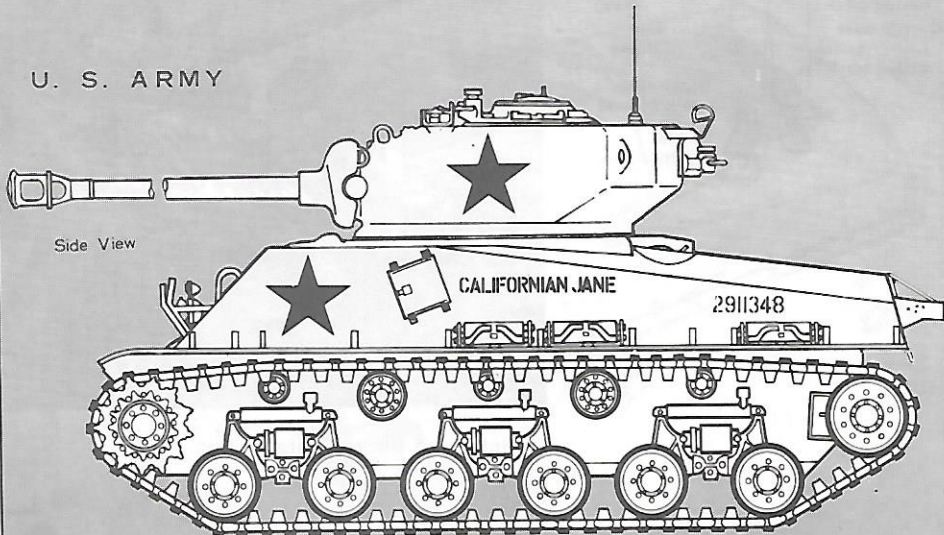



Side View

4Δ4Δ73

A12

4Δ4Δ73

A12





1/35 · M36 TANK
1/25 · Chieftain

The 1/35 Identical Tank Series

- _____ M41 WALKER BULLDOG
- _____ T-10 STALIN HEAVY TANK
- _____ M4 SHERMAN MEDIUM TANK
- _____ KING TIGER HEAVY TANK
- _____ HUNTING TIGER HEAVY TANK
- _____ PANTHER MEDIUM TANK
- _____ JAGDPANTHER MEDIUM TANK
- _____ LEOPARD MEDIUM TANK
- _____ TIGER I HEAVY TANK
- _____ M42 DUSTER
- _____ M60A1 MEDIUM TANK
- _____ TYPE 61 MEDIUM TANK
- _____ CENTURION MEDIUM TANK
- _____ M551 SHERIDAN
- _____ PANZER KAMPFWAGEN II
- _____ 8ton SEMI TRACK Sd.Kfz 7
- _____ KV-1 HEAVY TANK
- _____ M36 JACKSON
- _____ PANZER KAMPFWAGEN III
- _____ STURMGESCHUETZ III

1/25th-scale De Luxe Tank Series

- _____ CHIEFTAIN MEDIUM TANK
- _____ T-34 MEDIUM TANK
- _____ SU-100 TANK DESTROYER
- _____ TIGER I HEAVY TANK
- _____ PANTHER MEDIUM TANK
- _____ JAGDPANTHER TANK DESTROYER
- _____ CENTURION MEDIUM TANK

1/35 SCALE
MILITARY MINIATURE
SERIES



- _____ No.2 German Army Infantry
- _____ No.3 Schwimmwagen
- _____ No.4 U.S.Army Tank Crew
- _____ No.5 British 6Pounder Anti-Tank Gun
- _____ No.6 Kubelwagen

Tamiya Acrylic Paints

Need precise colour matching? Try the new Tamiya acrylic paints. Engineered by modelers for modeler's use. The final cover for the finest models. Insist on Tamiya for perfect results.



TAMIYA COLOR CATALOGUE

The latest in cars, boats, tanks and ships. Motorized, radio controlled and museum quality models are all shown in full color in Tamiya's latest catalogue. English, German, French and Japanese versions available.



U.S. ARMY SELF-PROPELLED AAGUN
M42 DUSTER



M4A3E8 SHERMAN

a part of the M4A3s equipped with 75mm guns had likewise been remodelled into the M4A3E8 type by replacing their gun turret, caterpillars and suspension devices with those of the latter type. The M4A3E8s which had been placed with the mechanized divisions at the fronts since August, 1944, was active as main-strength tanks in various central European fronts during the latter half of the world war and later in the Korean war as well.

However, all these M4 Shermans were dropped from the list of the U.S. Army organizations and equipments in 1956 after the M47 medium tanks (the Patton II type) and the M48s (the Patton III type) began to be placed with all the mechanized divisions on a large scale as their main-strength tanks in 1955, the preceding year.

The M4 Shermans had also been active outside the U.S. as some of them were granted to the NATO and SEATO forces after the World war II. The Japan Land Self-Defence Force, too, were granted with about 200 of them in October, 1954. They had since been active as main-strength tanks for the Japan Force until the 61-type medium tanks were produced. At present, the Shermans are being replaced with these 61-type medium tanks.

The details of the " Easy Eight " are as follows: Its hull is made of armoured-plates welded together. The front plate has an angle of inclination amounting to 47 degrees. The hull itself is subdivided into three compartments — the pilot chamber in front, the central

combat room and the engine compartment at the rear. A crew of five is active inside the hull — a pilot and a front gunner in the pilot chamber while a tank leader, a gunner and a charger in the combat room respectively. A single bulkhead partitions the combat room from the engine compartment to bolster hull structure and also to serve as a fire shield.

At the top of the pilot chamber, there are right and left large hatches, each opening at one side only. Each hatch is equipped with a periscope for outside view. In the combat room itself, a pilot seat is located at the left, while at the right, a front-gunner-and-copilot seat. The charger is situated at the left in the middle combat room, while the tank leader and the gunner, to the right.

The engine compartment contains a liquid-cooled gasoline engine, a fuel tank and an extinguisher. Its upper door is a folding one, while at the bottom of the front gunner seat is fitted an emergency escape hatch when damaged by enemy shots.

The gun turret is casted and extended at the rear. And it differs from that of a 75mm gun type in that fully shot-proof casing covers its whole length. It is also equipped with a folding hatch for the charger and an anti-air 12.7mm (50-inch) machine gun holder. This, however, is an earlier version, the latter one being fitted with a hatch that opens to one side only.

The hatch for a tank leader opens to one side only for both versions. It is equipped with a cupola which has five periscopes for

outside view.

The engine is designed and produced by the Ford and is a 60°, V-type, 8-cylinder, GAA II (or GAA III), liquid-cooled gasoline engine with a power of 500/2,000 r.p.m.

The main gun of the " Easy Eight " is a 76mm (52-inch) M1A1C (or M1A2) tank gun with a long gun barrel. It is further improved in that its initial velocity is much increased and made more powerful than the M-3 type, 75mm (40-inch) gun of the former M4 series.

The armour-piercing power of the M1A2 gun when it uses armour-piercing shots reaches 66, 61, 56, and 51 mm at 500, 1,000, 1,500, and 2,000m respectively. Its maximum range is said to reach 14,700m. The total number of shots carried along is 86, while its firing speed is 20 shots per minute.

The main gun and other aiding machine guns can be handled either manually or mechanically with a motor device. The main gun also can change its firing angles from 1° to 25°. The time needed for a complete 360° round of the gun turret is about 15 seconds.

Besides the main gun, the " Easy Eight " is equipped with two 7.62mm (30-inch) Browning M1919A4 machine guns, one in front hull, the other, in front of gun turret. Also, a single 12.7mm (50-inch) Browning M2-type anti-air machine gun is mounted on the upper gun turret.

In short, this M4A3E8 Sherman tank was a masterpiece medium tank of the high world standard during the latter half of 1940s.



Essential Specification of the M4A3E8

| | |
|-----------------------|---|
| Weight: 33t | Overall height: 3.02m |
| Number of crew: 5 | Distance from the lowest part to the ground: 0.335m |
| Overall length: 5.88m | Length of ground portion: 3.73m |
| Overall width: 2.98m | Caterpillar width: 0.61m |

TAMIYA
TAMIYA PLASTIC MODEL CO.
628, OSHIKA, SHIZUOKA CITY, JAPAN