



Insert a rod into the panel brackets to obtain correct alignment of hull brackets.

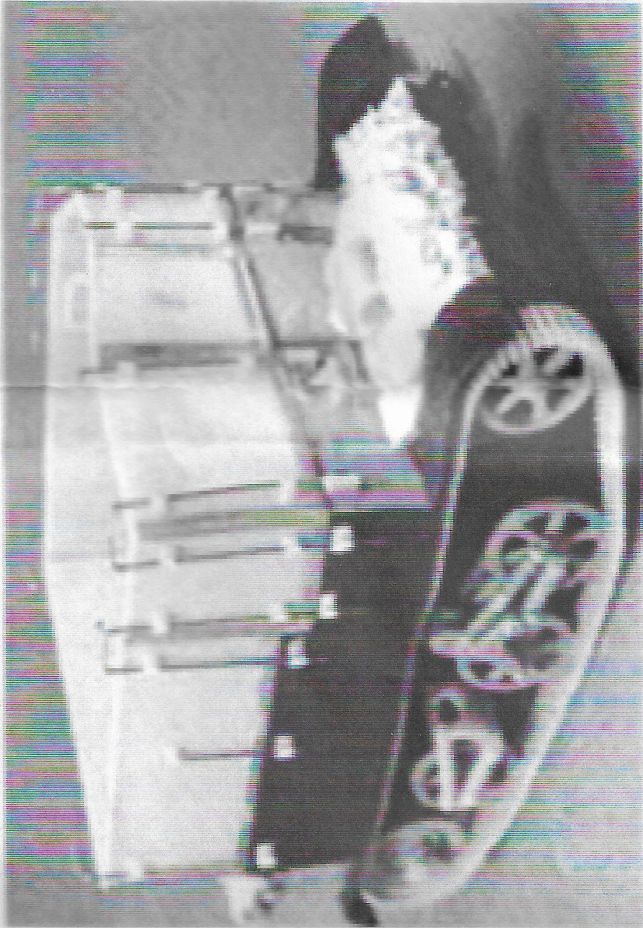

All joints between panels and hull were covered with Bostik. Simulate this with sea-foam paper, Milliput ...

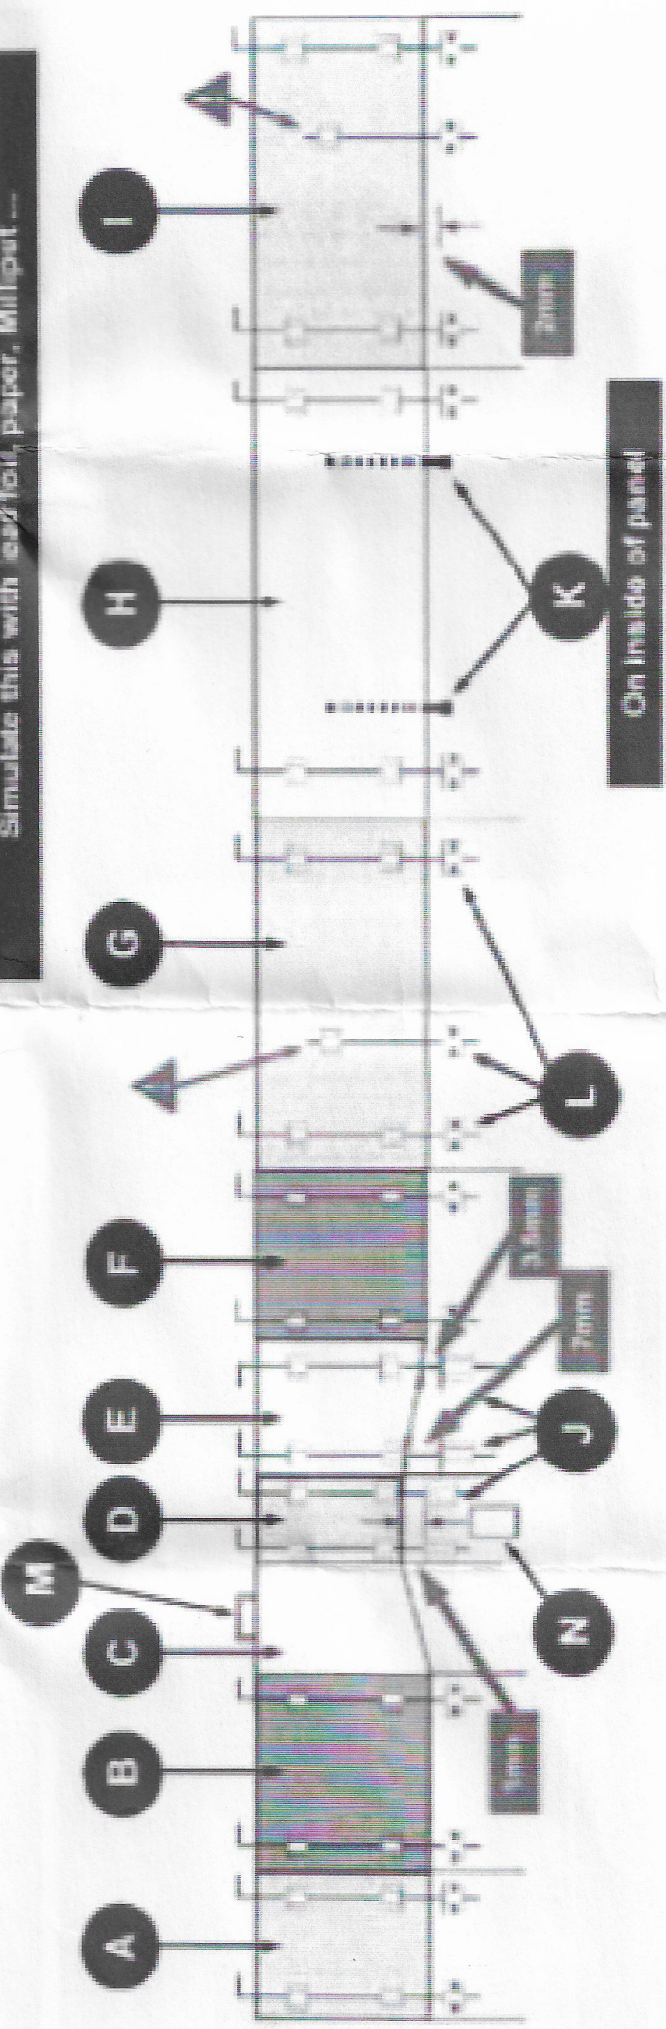


35.299

Universal Carrier deep wading for Tamiyal/ Resicast

A	Side front right panel	x1	B	Front panel left	x1
C	Front side panel	x1	D	Front panel	x1
E	Front side panel	x1	F	Side front left panel	x1
G	Side left panel	x1	H	Rear panel	x1
I	Side right panel	x1	J	Long brackets	x8+4
K	Rear inner support	x2+1	L	Short brackets	x12+4
M	Lifting handle	x1+1	N	Front wear panel	x1
	Drass rod				



Numerous photos show the driver's panel removed once on dry soil

Removes top protection rails from Tamlya kit

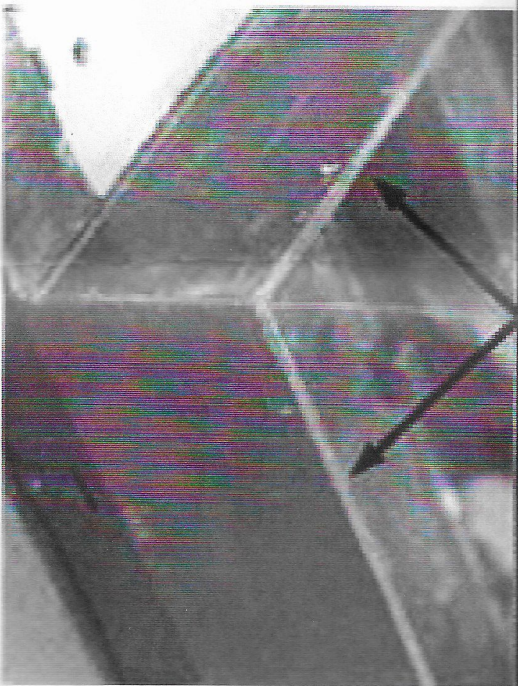

Drill out brackets.

Proceed carefully and start with a small mesh then proceed in steps with larger ones ending by 0,65mm max

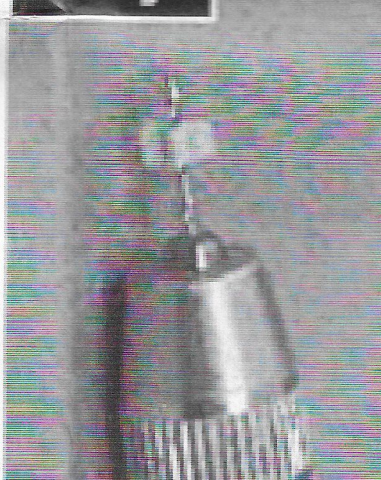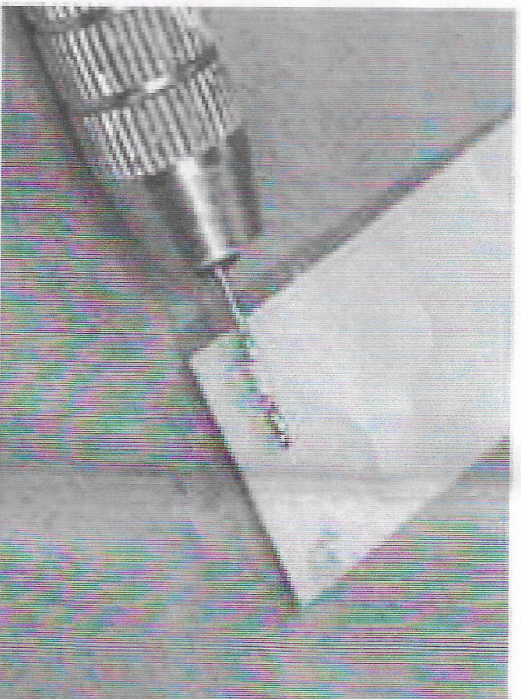

Attach rear supports K to inside of rear panel H

Attach to rear of hull then add other panels one at a time

