

#### WARNING

Wear eye protection when working with resin products. Nuisance dust may be generated when sanding or sawing resin products.


#### ASSEMBLY INSTRUCTIONS

Wash parts with soap and water. Remove wheel from sprue by using either a razor saw or hobby knife. Sand bottom of wheel flat. Carefully drill hole in wheel and glue wheel to axle with either a superglue or 5 minute epoxy.

#### PAINTING INSTRUCTIONS

Method 1. Paint tire dark gray, use a black wash in the tread area and around the wheel, dry brush tire a slightly lighter shade of gray. Finish tire by painting the wheel and the brake the proper color.

Method 2. Paint entire tire and wheel black. Dry brush tire with shades of gray and brown. Paint wheel and brake area proper color.

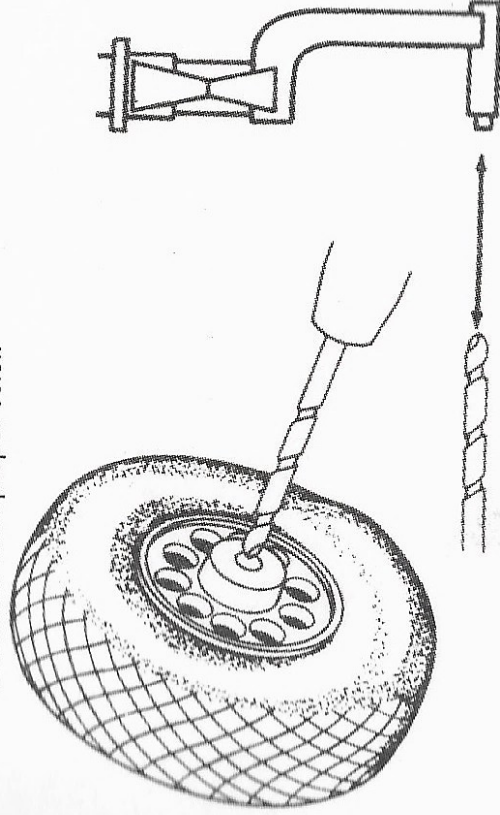

TRUE DETAILS®

1115 Crowley Drive  
Carrollton, TX 75011-5010  
Made in USA

**MMD**