

Mc Donnell F 101 B Voodoo



Basic Kit : Frog/Hasegawa RF-101 C

1. Glue fuselages halves together. Cut out cockpit-opening 21 mm rearward.
2. Cut off nose of the fuselage where indicated on the drawing. Make new nose from balsa plastic paste or use a nose of an other kit of similar shape to build up. Refer to drawing. Use body putty or plastic paste to fill all gaps.
3. Make new jet orifices after having cut off 8 mm of that parts of the fuselage where the orifices meet it. Refer always to the drawing.
4. Insert in cockpit second seat and second instrument panel
5. Cut out new two-seater canopy referring to kit's canopy.
6. The F-101 B has no cannon-armament but is armed with two Genies or three Super Falcon AAMs. For the Super Falcons use those of Hasegawa's F-102 or F-106 kit . Refer to drawing.
7. Otherwise build kit corresponding to instructions.

North American F-100 F Super Sabre

Basic kit: Frog/Hasegawa F-100 D

1. Cut off nose of the fuselage where indicated on the drawing. Make an insert 13,5 mm in length from balsa, styrene sheet or an other F-100 fuselage and glue the three fuselage parts together. Use body putty or plastic paste to fill all gaps.
2. Insert in cockpit second seat and second instrument panel.
3. Cut out new two-seater canopy referring to kit's canopy.
4. Fill outer cannon fairings as F-100Fs have only two cannons.
5. Otherwise build kit corresponding to instructions.

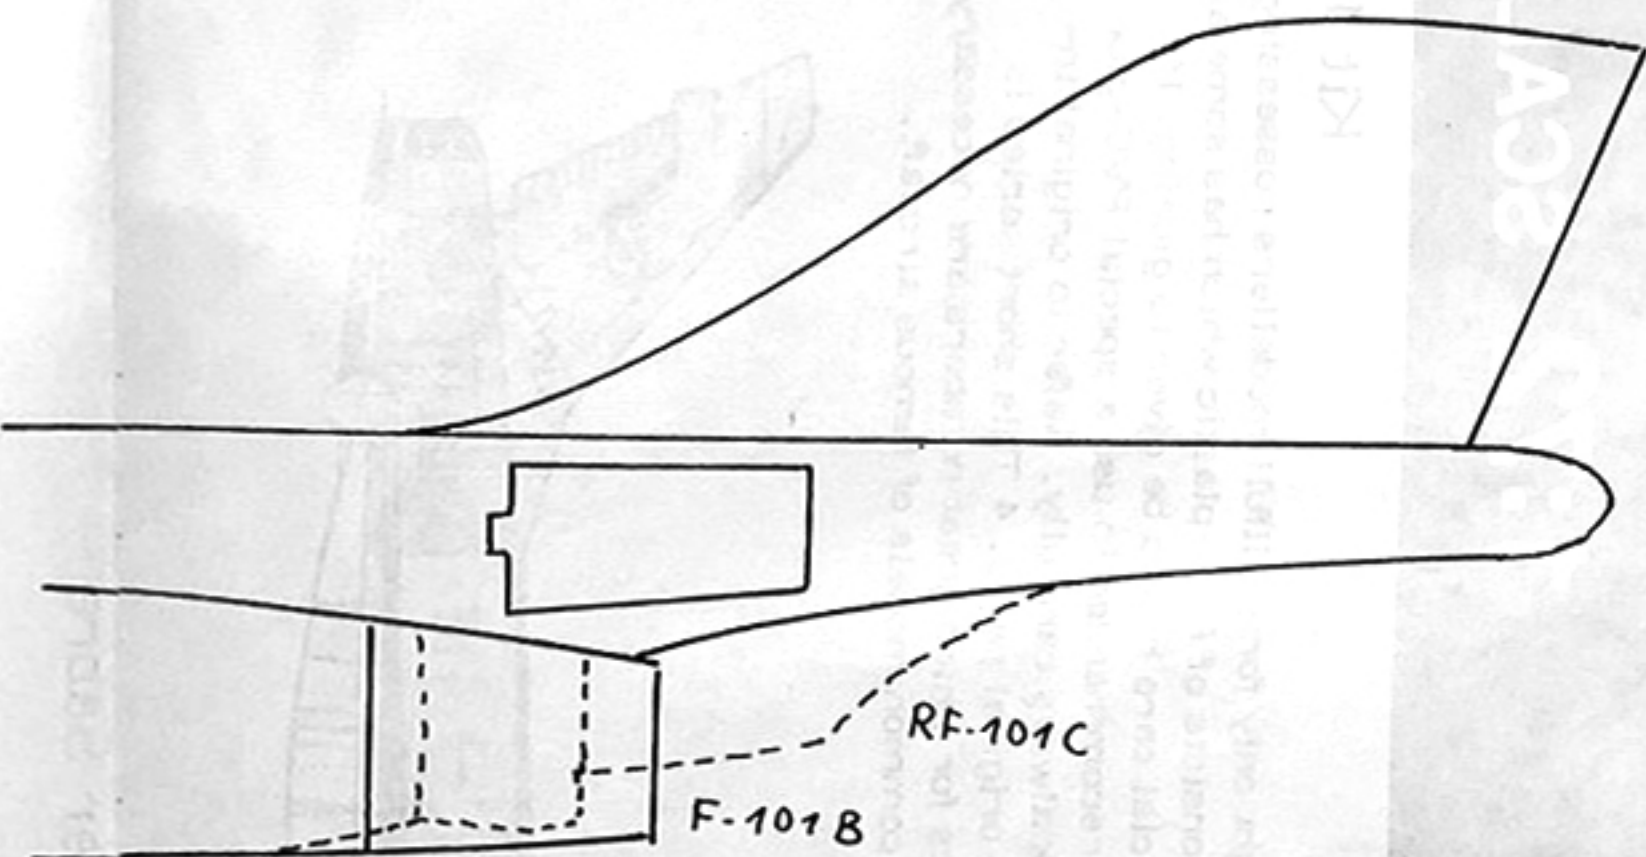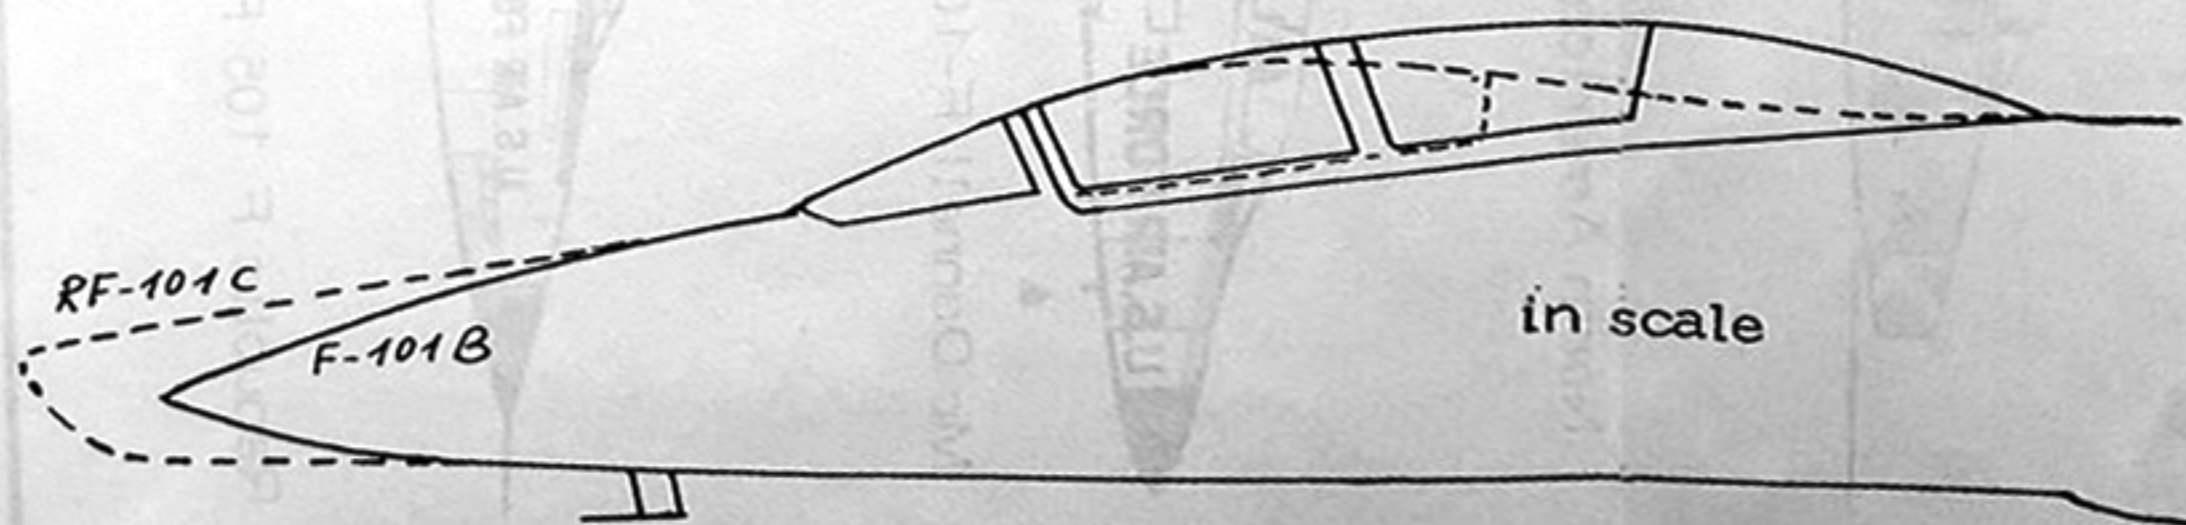

Republic F 105 F Thunderchief
Basic kit: Frog/Hasegawa F-105 D

1. Cut off nose of the fuselage where indicated on the drawing. Make an insert 22 mm in length from balsa styrene sheet or an other f-105 fuselage and glue the three fuselage parts together. Use body putty or plastic paste to fill all gaps.
2. Insert in cockpit second sa seat and second instrument panel
3. Cut out new two-seater canopy referring to kit's canopy
4. Otherwise build kit corresponding to instructins instructions