


# MODEL TECHNOLOGIES™

15561 PRODUCT LANE, UNIT D • HUNTINGTON BEACH, CA 92649

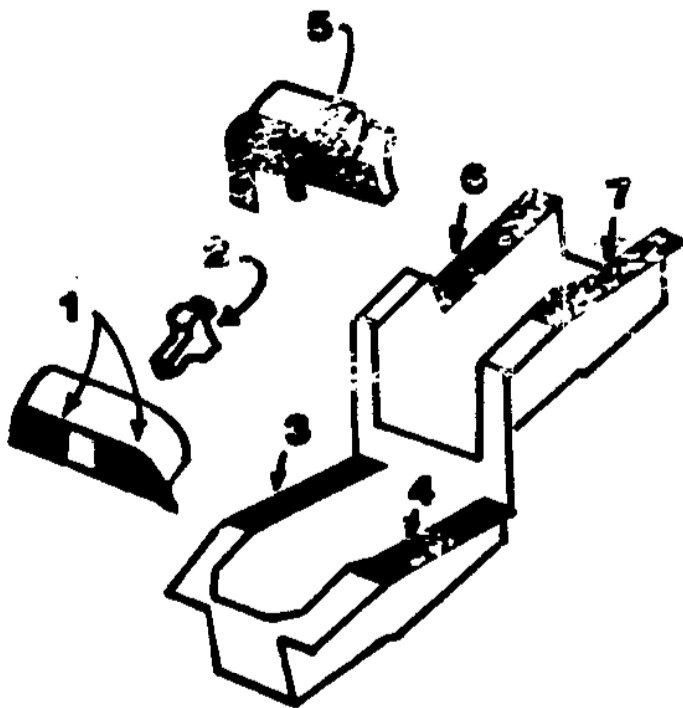

The placards can be removed from the sheet by cutting with fine stainless steel scissors. Placards may also be removed by scoring with an X-acto knife. Repeated light scoring is the best method, as applying too much pressure may cause the thin metal to distort.

Control panel can be made more attractive by placing small drops of KRISTAL-KLEER over dial faces. Raised detail can be added to the side consoles by the addition of appropriately colored stretched plastic sprue. This sprue can be cut into thin sections and glued in place using thinned white glue. Simply place a small drop of glue where you wish to place a "knob." Pick up the "knob" with the tip of a sharp X-acto knife, and place the knob onto the glue drop.

Cover the completed assembly with a coat of clear flat paint. Touch-up any dial faces with clear gloss.

**CAUTION: METAL PARTS HAVE SHARP EDGES. KEEP OUT OF REACH OF SMALL CHILDREN.**

© Copyright 1985 MODEL TECHNOLOGIES. ALL RIGHTS RESERVED.