


Standard position of top wing numbers

Standard position of top wing numbers

LIMITED EDITION!
EA-6B
 Prowlers Part 3

CED48207
 CED72207

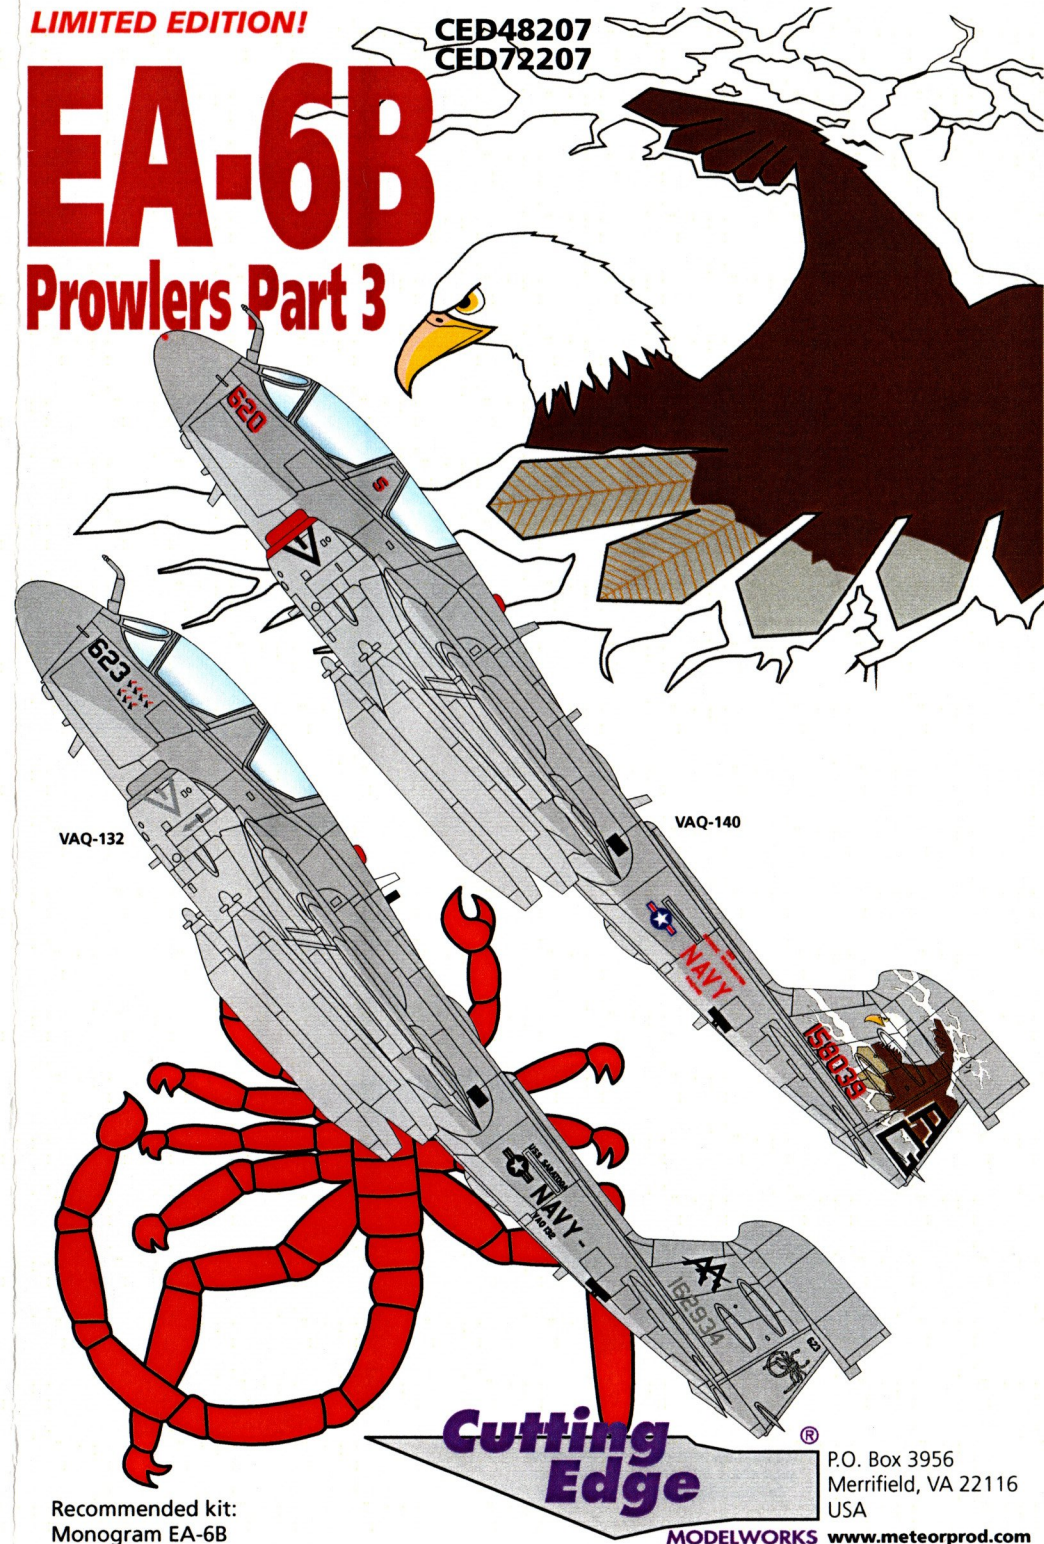

VAQ-132

VAQ-140

Cutting Edge[®]
 MODELWORKS

Recommended kit:
 Monogram EA-6B

P.O. Box 3956
 Merrifield, VA 22116
 USA

www.meteorprod.com

Write, call, or visit our home page to
 order our 120+ page catalog of decals,
 kits, conversions, tools, books,
 magazines, etc., and we'll send it to you
 right away!

© Cutting Edge Modelworks, 2002

...available from



P.O. Box 3956, Merrifield, VA 22116 USA

☎ 703/971-0500 FAX 703/971-8111




www.meteorprod.com

CED48207
CED72207

Prowlers Part 3

(same jet)

Bu No 158039
VAQ-140
USS John C Stennis

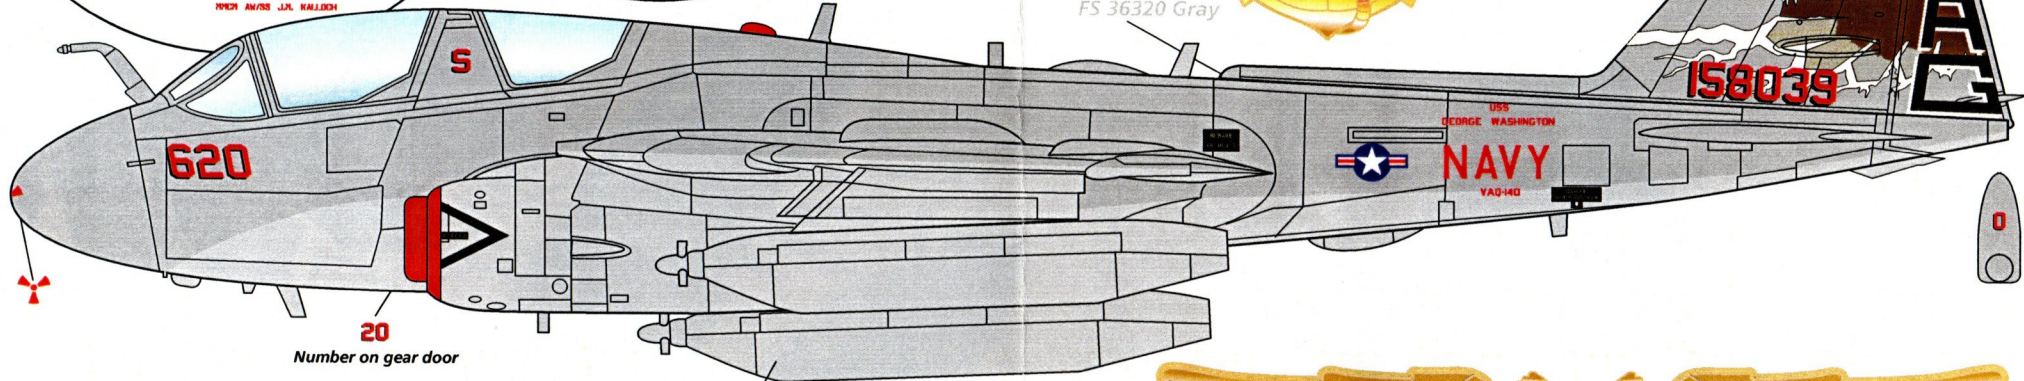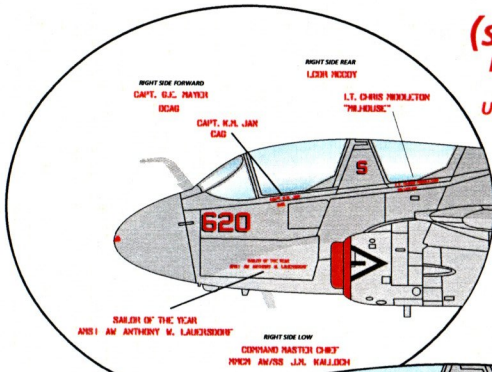

Note that drop shadows are NOT handed (they face forward on left side and rearward on right side)

EA-6B

Bu No 158039
VAQ-140

USS GEORGE WASHINGTON




FS 36375 Gray

EA-6B

Bu No 162934
VAQ-132
USS SARATOGA

Note antenna arrangement and colors

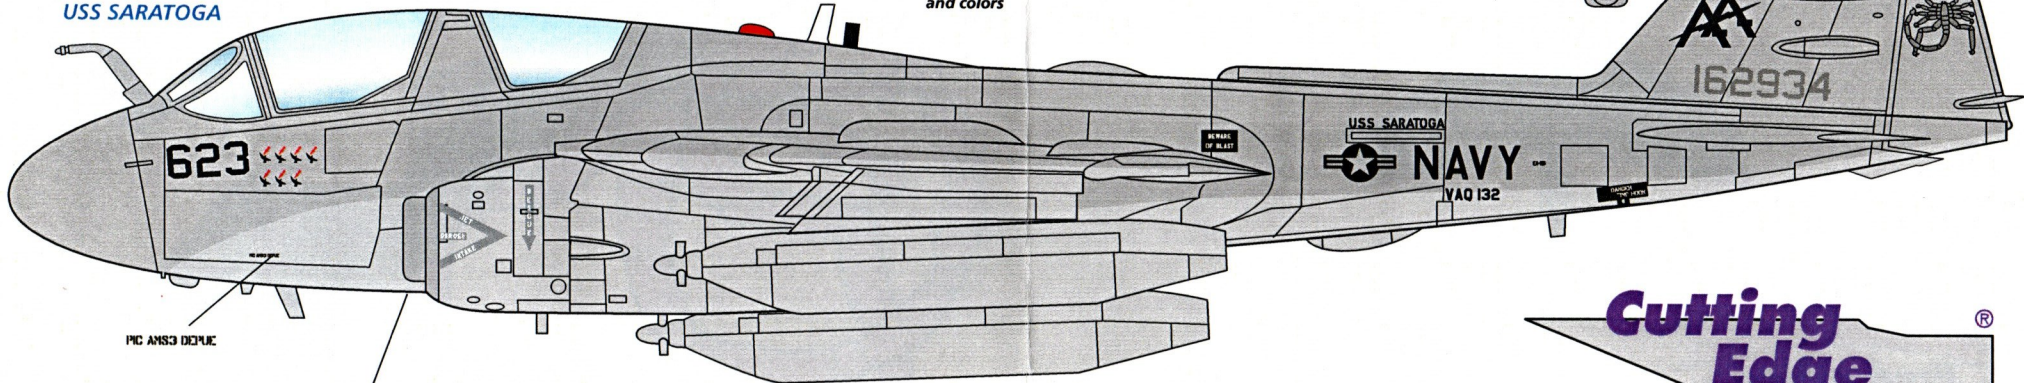

No number was visible on the nose gear door, but we've provided one for the likely case it was applied

Cutting Edge
MODELWORKS

158039

- Note that the drop shadows are NOT handed on this aircraft.

162934

- We do not have photos of this aircraft from the right side. We do not know the orientation of the mission marks (or if they were even applied).

Applying the Decals

You probably already know all this stuff, so feel free to use your regular process; however, if you're new to aftermarket decals, here goes:

- Generally, use the Microscale Finishing System. We don't recommend extremely strong decal solvents such as Solvaset.
- Your model must have a smooth, glossy surface, as decals won't adhere well to matte surfaces. Use gloss paints or your favorite clear gloss overspray over matte or semigloss paint.
- Cut each subject out without trimming off the slight excess film (this helps the decal film disappear when dry).
- Put the decal in warm water that has a drop or two of liquid dishwashing soap or photo-flo for 10 seconds.
- When the decal will slide off the backing paper without forcing it, apply it to the proper position on your model. Slide the backing paper out from underneath.
- Gently blot off excess water and smooth out bubbles under the decal surface. If you wish, carefully brush on a mild decal softener such as Micro-Sol.
- When all decals are completely dry, gently wash off all excess decal adhesive.
- Finally, overcoat your model with a good quality gloss coat, followed by your choice of matte or eggshell clear topcoat.

FS 595 Color Cross Reference

FS 6320 Xtracolor X135, ModelMaster 1741, Gunze Sangyo H307, Mr Color 307, Polly-S 837, Pro Modeler 88-0036, Floquil 303133

FS 6375 Pro Modeler 88-0034, Polly Scale 505304

Bibliography

Original photos.

Special thanks to Capt Dana "Smudge" Potts and Bryan Wilburn!!