
Recommended Kit: Hasegawa/Minicraft F-86F Sabre

Note: Kit produces model of Japanese F-86F-40. Korean vintage Sabres had a shorter wing span. For correct span, wingtip should be removed to outside edge of aileron and a new tip formed. (Korean Sabres had a wingspan of 37'1".)

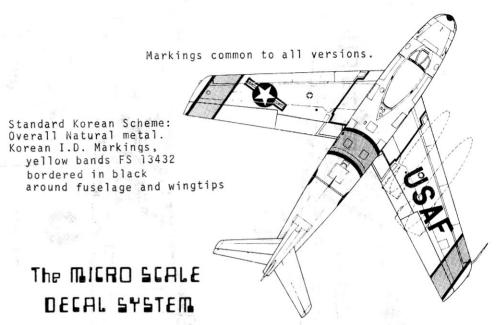

Spray entire painted surface with MICRO COAT GLOSS decal primer.

Although you may apply MICRO SCALE DECALS with just water you will want to use one of our decal setting solutions to make the MICRO SCALE DECALS conform perfectly to irregular surfaces.

Cut from the sheet the MICRO SCALE DECALS you need. Then dip the decal in clean water for a few seconds. Remove and place on a paper towel for about one minute. The decal will slide freely on the backing paper. Slide decal to edge of backing paper with a sable brush. Pick up decal, still on the backing paper with tweezers and position on the model. Hold decal in place with the brush, slide paper out from under decal. To change position, use brush wet with MICRO SET and float the decal into correct position.

Apply MICRO SET or MICRO SOL to the decal if the surface is irregular (rivets, panel scoring etc). With MICRO SET wait a few minutes, then press lightly on the decal with a MICRO SET dampened tissue until the details show through. With MICRO SOL daub the surface of the decal and allow to dry. Reapply if necessary, it acts by itself. If any small blister still remains prick with a pin, apply MICRO SET or MICRO SOL and press lightly.

Make sure the model is dry, then apply MICRO COAT FLAT or MICRO COAT GLOSS, depending on the finish desired, to the entire painted surface of the model. This completely hides the decal film, protects the model and gives a uniform finish.

